



**European Edition**

# Optical Fibre Cables



# Table of Contents

<b>General Information</b>	<b>2 – 3</b>
<b>Partnumber Reference</b>	<b>4 – 6</b>
<b>European Partnumber Coding</b>	<b>6</b>
<b>Universal (outdoor &amp; indoor use)</b>	
<i>also with improved rodent protection</i>	
<i>Multi-tube cables</i>	<i>7 – 8</i>
<i>Central tube cables, max. 24 fibres</i>	<i>9 – 10</i>
<i>Central tube cables, max. 12 fibres</i>	<i>11 – 12</i>
<b>Outdoor</b>	
<i>also with improved rodent protection</i>	
<i>Multi-tube cables</i>	<i>13 – 14</i>
<i>Central tube cables, max. 24 fibres</i>	<i>15 – 16</i>
<b>Intex (for internal &amp; external use)</b>	
<i>Mini-Breakout (Distribution) cables</i>	<i>17 – 18</i>
<b>Indoor</b>	
<i>Mini-Breakout (Distribution) cables</i>	<i>19 – 20</i>
<i>Breakout cables</i>	<i>21 – 22</i>
<i>Interconnection (simplex &amp; duplex) cables</i>	<i>23 – 24</i>
<i>Pigtails</i>	<i>25</i>
<i>Mobile cables</i>	<i>26</i>



## General Information

[Back to Content](#)

### ► *Belden Quality*

Belden guarantees, that [all supplied optical fibre cables have been comprehensively tested](#). A Statistical Process Analysis ensures the maintenance of the specifications. With the use of the most up-to-date process controls the stability of all optical and mechanical values can be guaranteed. All Belden development and engineering departments, production facilities and sales offices for optical fibre cables are certified according to [ISO 9001](#) and ISO 14001.



### ► *Optical Transmission*

[Belden only uses fibres of world-wide renowned fibres-manufacturers.](#)

This enables us to give the already mentioned guarantees on life-time and performance. By Belden specified data for attenuation and dispersion respectively bandwidth concerns the cabled optical fibres. Of every standard production length the attenuation (MM fibres at 1300 nm, SM fibres at 1310 nm and 1550 nm) are measured. The respective test report is attached to the reel.

### ► *Metal-free Cables*


Almost all optical fibre cables of Belden, especially for datacom, are metal-free. Consequently these cables are immune to lightning and electromagnetic interference (EMC-safe), spark-free and require no earthing.

### ► *Dry Multi-tube Cables*

To guarantee longitudinal watertightness according to IEC 60793-1-2-F5 we use swellable yarns and/or tapes. No aquagel is used between the tubes. For functional reasons we only use jelly filled [\(non dripping and silicon-free\)](#) loose tubes.

Legend: **dc** = dry cable

### ► *Outdoor & Indoor = Universal*



### *Internal & External = Intex*

#### Universal possibilities of installation.

Belden's universal and intex cables unite a unique combination of construction and performance attributes that make them ideal for both outdoor & indoor use. Consequently splicing can be avoided going from outdoor into indoor use.

### ► *Halogen-free Cables*

Our halogen-free optical fibre cables meet the most important international standards. Moreover Belden selected halogen-free jacketing materials suitable for outdoor use like direct burial.

<b>Material:</b>	HD 624.7
<b>Flame Retardancy:</b>	
– Loose tube cables:	IEC 60332-3C
– Tight buffered cables:	IEC 60332-1 or 2
<b>Corrosivity:</b>	IEC 60754-2 (HD 602, BS 6425.2)
<b>Low Smoke:</b>	ASTM E662
<b>Toxicity:</b>	NES 713 (HD 605, BS 6425.1)
<b>UV-resistance:</b>	ISO 4892-2

In comparison to products containing halogens (like PVC), these halogen-free materials offers considerable advantages in case of a fire:

[Less impairment to vision, minimal poisonous gases, no release of highly caustic acids, more safety for man, nature and materials.](#)

Legend:

**FRNC** = Flame Retardant, Non Corrosive

**LSNH** = Low Smoke, Non Halogen.

[Belden's halogen-free optical fibre cables are both FRNC and LSNH according to above mentioned standards.](#)

### ► *Functionality*

We set great value on the construction of our optical fibre cables to achieve the best results with a compact design for limited duct space and for excellent watertightness. Our cables are as thin as can be, very light and therefore easier to install.

### ► *Product Variety*

If you do not find the product you need in this catalogue, we offer the option of special (custom made) cables. Here you can choose between different constructions, mixed fibre types, jacket colours, private labelling, etc.

### ► *15 Year Warranty*

Our customers trust in the quality of Belden products. To ensure the customer that this quality will remain constant even after years, Belden offers standard a [15 year warranty](#) on all optical fibre cables. This implies the maintenance of all technical performances within this period.

### ► *Life-Time*

As all fibres show surface imperfections, Belden uses exclusively fibres with proof test-level  $\geq 8.8 \text{ N} / \geq 1\% = \geq 100 \text{ kpsi}$ . Therefore the expected lifetime of our optical fibre cables is [> 30 years](#).

# General Information

[Back to Content](#)

## Rodent Protection

In almost all our optical fibre cables we are making use of glass reinforced yarns as strength members. These yarns also take care for a standard protection against rodents. We also offer cables with improved rodent protection by means of extra glass reinforced yarns or an extra layer of Nylon (polyamide). The idea behind this is that rodents – as every creature in nature – will look for (the pass of) least resistance. So apart from very exclusive situations, rodents will bite everywhere (to keep their teeth in proper shape) but only continue if they feel comfortable. In case of a nylon layer or “glass” yarns they will normally stop and continue somewhere else. Please note that a metal-free rodent protection never guarantees a 100 % protection against rodents.



## Optical Fibre-Types as specified in ISO/IEC 11801

Optical Fibre-type	Core diameter in $\mu\text{m}$	Bandwidth in MHz x km 850 / 1300 nm	Gigabit Ethernet	GbE performance in m 850 / 1300 nm
OM1	50 or 62.5	200/500	1 GbE	220/550
OM2	50 or 62.5	500/500	1 GbE	550/550
OM3	50	1500/500	10 GbE (serial)	300/not specified
OS 1	Single-Mode fibre			

Source: ISO/IEC 11801 2<sup>nd</sup> edition — 2001-10-10

Optical Fibre-type	Belden standard fibres	1 GbE performance in m 850/1300 nm	10 GbE performance in m 850 nm
OM1	62.5/125 (200/600 MHz x km)	275/550	33
OM2	50/125 (600/1200 MHz x km)	550/550	82
OM2e	50/125 (600/1200 MHz x km)	750/2000	110
OM3	50/125 (1500/500 MHz x km)	900/550	300
OS 1	Single-Mode fibre according to ITU-G.652B		

## Characteristics (cabled) Single-Mode optical fibres according to ITU-G.655

Fibre-type	Size ( $\mu\text{m}$ )	Wavelength (nm)	Attenuation (dB/km) average/max.	Non-zero dispersion range 1530 – 1565 nm (ps/(nm x km))	PMD Link design value (ps/ $\sqrt{\text{km}}$ )	Refractive Index
8/125	8.4 $\pm$ 0.6 125 $\pm$ 1	1550	0.25/0.28	3.5 $\leq$ D $\leq$ 8.5	$\leq$ 0.1	1.470

## Belden Manufacturing

Every Belden Optical Fibre Cable is based on Belden’s philosophy of reliability and performance. All Belden Optical Fibre Cables for the European market are exclusively manufactured in the Netherlands (Venlo).





# Partnumber Reference

[Back to Content](#)

## Intex-, Indoor and Mobile Cables • Optical Fibre Cables with tight buffered fibres

Cable-type (pages in catalog)	Fibre-count	Jacket	Fibre-type					Std. Del.-length	Datasheet
			SM 9/125 OS1	OM2	MM 50/125		MM 62.5/125 OM1		
<b>Intex Mini-Breakout</b> with standard Rodent Protection page 17 and 18	4	FRNC	GUMT904	GUMT204	GUMT404	GUMT304	GUMT104	2100	Intex Mini-BO
	6	FRNC	GUMT906	GUMT206	GUMT406	GUMT306	GUMT106	2100	
	8	FRNC	GUMT908	GUMT208	GUMT408	GUMT308	GUMT108	2100	
	12	FRNC	GUMT912	GUMT212	GUMT412	GUMT312	GUMT112	2100	
	24	FRNC	GUMT924	GUMT224	GUMT424	GUMT324	GUMT124	2100	
<b>Intex Mini-Breakout</b> with improved Rodent Protection (not listed in catalog)	4	FRNC	GUXT904	GUXT204	GUXT404	GUXT304	GUXT104	2100	Intex Mini-BO HR
	6	FRNC	GUXT906	GUXT206	GUXT406	GUXT306	GUXT106	2100	
	8	FRNC	GUXT908	GUXT208	GUXT408	GUXT308	GUXT108	2100	
	12	FRNC	GUXT912	GUXT212	GUXT412	GUXT312	GUXT112	2100	
	24	FRNC	GUXT924	GUXT224	GUXT424	GUXT324	GUXT124	2100	
<b>Indoor Mini-Breakout</b> with dry semi-tight buffered fibres (not listed in catalog)	2	FRNC		GIMK202	GIMK402	GIMK302	GIMK102	2100	
	4	FRNC		GIMK204	GIMK404	GIMK304	GIMK104	2100	
	8	FRNC		GIMK208	GIMK408	GIMK308	GIMK108	2100	
<b>Indoor Mini-Breakout</b> with tight buffered fibres page 19 and 20	2	FRNC		GIMT202	GIMT402	GIMT302	GIMT102	2100	Mini-BO
	2	FRNC		YE00051			YE00056	2100	
	4	FRNC		GIMT204	GIMT404	GIMT304	GIMT104	2100	
	6	FRNC		GIMT206	GIMT406	GIMT306	GIMT106	2100	
	8	FRNC		GIMT208	GIMT408	GIMT308	GIMT108	2100	
	12	FRNC		GIMT212	GIMT412	GIMT312	GIMT112	2100	
	16	FRNC		GIMT216	GIMT416	GIMT316	GIMT116	2100	
	24	FRNC		GIMT224	GIMT424	GIMT324	GIMT124	2100	
<b>Indoor Breakout</b> with dry semi-tight buffered fibres (not listed in catalog)	2 (Flat)	FRNC	GIBK902	GIBK202	GIBK402	GIBK302	GIBK102	2100	
	4	FRNC	GIBK904	GIBK204	GIBK404	GIBK304	GIBK104	2100	
	6	FRNC	GIBK906	GIBK206	GIBK406	GIBK306	GIBK106	2100	
	8	FRNC	GIBK908	GIBK208	GIBK408	GIBK308	GIBK108	2100	
	12	FRNC	GIBK912	GIBK212	GIBK412	GIBK312	GIBK112	2100	
<b>Indoor Breakout</b> with tight buffered fibres page 21 and 22	2	FRNC	GIBT902	GIBT202	GIBT402	GIBT302	GIBT102	2100	Breakout cables
	4	FRNC	GIBT904	GIBT204	GIBT404	GIBT304	GIBT104	2100	
	6	FRNC	GIBT906	GIBT206	GIBT406	GIBT306	GIBT106	2100	
	8	FRNC	GIBT908	GIBT208	GIBT408	GIBT308	GIBT108	2100	
	12	FRNC	GIBT912	GIBT212	GIBT412	GIBT312	GIBT112	2100	
	24	FRNC	GIBT924	GIBT224	GIBT424	GIBT324	GIBT124	2100	
<b>Duplex Fig. 8</b> page 23 and 24	2	FRNC	GIPS902	GIPS202	GIPS402	GIPS302	GIPS102	2100	Duplex 2.8 mm MiniZip 1.6 – 1.8 mm
	2	FRNC	GIPT902	GIPT202	GIPT402	GIPT302	GIPT102	2100	
<b>Simplex 2.8 mm</b> page 23 and 24	1	FRNC	YE00126					2100	Simplex ST  Simplex-DST
	1	FRNC	YE00023				YE00045	2100	
	1	FRNC	GIPS901	GIPS201	GIPS401	GIPS301	GIPS101	2100	
	1	FRNC	YE00026					2100	
	1	FRNC	YE00024					2100	
<b>Pigtails</b> page 25	1	TPE	GIOK901	GIOK201	GIOK401	GIOK301	GIOK101	2100	Pigtails
	1	TPE	YE00021	YE00039				2100	
	1	PA	YE00020					2100	
<b>Mobile cables</b> page 26	4	PUR	GMMT904	GMMT204	GMMT404	GMMT304	GMMT104	2100	Mobile cables
	6	PUR	GMMT906	GMMT206	GMMT406	GMMT306	GMMT106	2100	
	8	PUR	GMMT908	GMMT208	GMMT408	GMMT308	GMMT108	2100	
<b>Breakout Kit</b> (not listed in catalog)	0	PUR	GUPT000 (49399)					2100	Breakout Kit
<b>Duplex APF</b> (not listed in catalog)	2	PVC						350	APF Duplex

# Partnumber Reference

[Back to Content](#)

## Universal- and Outdoor Cables • Optical Fibre Cables with loose tubes

Cable-type (pages in catalog)	Fibre-count		Fibre-type					Std. Del.-length	Datasheet		
			SM 9/125 OS1	OM2	MM 50/125 OM2e	OM3	MM 62.5/125 OM1				
<b>Universal Multi-tube cables</b>  page 7 and 8	12	6*2	GUSC912	GUSC212	GUSC412	GUSC312	GUSC112	4100	Type-xxdcNH		
	24	6*4	GUSC924	GUSC224	GUSC424	GUSC324	GUSC124	4100			
	36	6*6	GUSC936	GUSC236	GUSC436	GUSC336	GUSC136	4100			
	48	6*8	GUSC948	GUSC248	GUSC448	GUSC348	GUSC148	4100			
	24	2*12	GUSD924	GUSD224	GUSD424	GUSD324	GUSD124	2100			
	36	3*12	GUSD936	GUSD236	GUSD436	GUSD336	GUSD136	2100			
	48	4*12	GUSD948	GUSD248	GUSD448	GUSD348	GUSD148	2100			
	60	5*12	GUSD960	GUSD260	GUSD460	GUSD360	GUSD160	2100			
	72	6*12	GUSD972	GUSD272	GUSD472	GUSD372	GUSD172	2100			
	96	8*12	GUSE996	GUSE296	GUSE496	GUSE396	GUSE196	2100			
	144	12*12	GUSF944	GUSF244	GUSF444	GUSF344	GUSF144	2100			
	<b>Universal Multi-tube cables</b> with improved Rodent Protection  page 7 and 8	24	2*12	GURD924	GURD224	GURD424	GURD324	GURD124		2100	Type-xxdcHR
36		3*12	GURD936	GURD236	GURD436	GURD336	GURD136	2100			
48		4*12	GURD948	GURD248	GURD448	GURD348	GURD148	2100			
60		5*12	GURD960	GURD260	GURD460	GURD360	GURD160	2100			
72		6*12	GURD972	GURD272	GURD472	GURD372	GURD172	2100			
<b>Universal Central tube (4.2 mm) cables</b>  page 9 and 10	4	1*4	GUSB904	GUSB204	GUSB404	GUSB304	GUSB104	2100	Type-24NH		
	6	1*6	GUSB906	GUSB206	GUSB406	GUSB306	GUSB106	2100			
	8	1*8	GUSB908	GUSB208	GUSB408	GUSB308	GUSB108	2100			
	12	1*12	GUSB912	GUSB212	GUSB412	GUSB312	GUSB112	2100			
	16	1*16	GUSB916	GUSB216	GUSB416	GUSB316	GUSB116	2100			
	24	1*24	GUSB924	GUSB224	GUSB424	GUSB324	GUSB124	2100			
<b>Universal Central tube (4.2 mm) cables</b> with improved Rodent Protection  page 9 and 10	4	1*4	GURB904	GURB204	GURB404	GURB304	GURB104	2100	Type-24HR		
	6	1*6	GURB906	GURB206	GURB406	GURB306	GURB106	2100			
	8	1*8	GURB908	GURB208	GURB408	GURB308	GURB108	2100			
	12	1*12	GURB912	GURB212	GURB412	GURB312	GURB112	2100			
	16	1*16	GURB916	GURB216	GURB416	GURB316	GURB116	2100			
	24	1*24	GURB924	GURB224	GURB424	GURB324	GURB124	2100			
<b>Universal Central tube (3.2 mm) cables</b>  page 11 and 12	2	1*2	GUSA902	GUSA202	GUSA402	GUSA302	GUSA102	4100	Type-12NH		
	4	1*4	GUSA904	GUSA204	GUSA404	GUSA304	GUSA104	4100			
	6	1*6	GUSA906	GUSA206	GUSA406	GUSA306	GUSA106	4100			
	8	1*8	GUSA908	GUSA208	GUSA408	GUSA308	GUSA108	4100			
	12	1*12	GUSA912	GUSA212	GUSA412	GUSA312	GUSA112	4100			
<b>Universal Central tube (3.2 mm) cables</b> with improved Rodent Protection  page 11 and 12	2	1*2	GURA902	GURA202	GURA402	GURA302	GURA102	4100	Type-12HR		
	4	1*4	GURA904	GURA204	GURA404	GURA304	GURA104	4100			
	6	1*6	GURA906	GURA206	GURA406	GURA306	GURA106	4100			
	8	1*8	GURA908	GURA208	GURA408	GURA308	GURA108	4100			
	12	1*12	GURA912	GURA212	GURA412	GURA312	GURA112	4100			
	<b>Outdoor Multi-tube cables</b>  page 13 and 14	12	6*2	GOSC912	GOSC212	GOSC412	GOSC312	GOSC112		4100	Type-xxdcPE
24		6*4	GOSC924	GOSC224	GOSC424	GOSC324	GOSC124	4100			
36		6*6	GOSC936	GOSC236	GOSC436	GOSC336	GOSC136	4100			
48		6*8	GOSC948	GOSC248	GOSC448	GOSC348	GOSC148	4100			
24		2*12	GOSD924	GOSD224	GOSD424	GOSD324	GOSD124	2100			
36		3*12	GOSD936	GOSD236	GOSD436	GOSD336	GOSD136	2100			
48		4*12	GOSD948	GOSD248	GOSD448	GOSD348	GOSD148	2100			
60		5*12	GOSD960	GOSD260	GOSD460	GOSD360	GOSD160	2100			
72		6*12	GOSD972	GOSD272	GOSD472	GOSD372	GOSD172	2100			
96		8*12	GOSE996	GOSE296	GOSE496	GOSE396	GOSE196	2100			
96		12*8	YE00001					2100			
144		12*12	GOSF944	GOSF244	GOSF444	GOSF344	GOSF144	2100			
<b>Outdoor Multi-tube cables</b> with improved Rodent Protection  page 13 and 14		12	6*2	GORC912	GORC212	GORC412	GORC312	GORC112	4100	Type-xxdcRP	
		24	6*4	GORC924	GORC224	GORC424	GORC324	GORC124	4100		
	36	6*6	GORC936	GORC236	GORC436	GORC336	GORC136	4100			
	48	6*8	GORC948	GORC248	GORC448	GORC348	GORC148	4100			
	24	2*12	GORD924	GORD224	GORD424	GORD324	GORD124	2100			
	36	3*12	GORD936	GORD236	GORD436	GORD336	GORD136	2100			
	48	4*12	GORD948	GORD248	GORD448	GORD348	GORD148	2100			
	60	5*12	GORD960	GORD260	GORD460	GORD360	GORD160	2100			
	72	6*12	GORD972	GORD272	GORD472	GORD372	GORD172	2100			
	96	8*12	GORE996	GORE296	GORE496	GORE396	GORE196	2100			
	144	12*12	GORF944	GORF244	GORF444	GORF344	GORF144	2100			
	<b>Outdoor Central tube (4.2 mm) cables</b>  page 15 and 16	4	1*4	GOSB904	GOSB204	GOSB404	GOSB304	GOSB104	2100		Type-24PE
		6	1*6	GOSB906	GOSB206	GOSB406	GOSB306	GOSB106	2100		
		8	1*8	GOSB908	GOSB208	GOSB408	GOSB308	GOSB108	2100		
12		1*12	GOSB912	GOSB212	GOSB412	GOSB312	GOSB112	2100			
16		1*16	GOSB916	GOSB216	GOSB416	GOSB316	GOSB116	2100			
24		1*24	GOSB924	GOSB224	GOSB424	GOSB324	GOSB124	2100			



# Partnumber Reference

[Back to Content](#)

## Universal- and Outdoor Cables • Optical Fibre Cables with loose tubes

Cable-type (pages in catalog)	Fibre-count		Fibre-type					Std. Del. - length	Datasheet
			SM 9/125 OS1	OM2	MM 50/125		MM 62.5/125 OM1		
<b>Outdoor Central tube (4.2 mm) cables</b> with improved Rodent Protection <b>Bluelight</b>  page 15 and 16	2	1*2	GORB902	GORB202	GORB402	GORB302	GORB102	2100	Type-24RP
	4	1*4	GORB904	GORB204	GORB404	GORB304	GORB104	2100	
	6	1*6	GORB906	GORB206	GORB406	GORB306	GORB106	2100	
	8	1*8	GORB908	GORB208	GORB408	GORB308	GORB108	2100	
	12	1*12	GORB912	GORB212	GORB412	GORB312	GORB112	2100	
	16	1*16	GORB916	GORB216	GORB416	GORB316	GORB116	2100	
	24	1*24	GORB924	GORB224	GORB424	GORB324	GORB124	2100	
<b>Outdoor Central tube (3.2 mm) cables</b>  (not listed in catalog)	2	1*2	GOSA902	GOSA202	GOSA402	GOSA302	GOSA102	4100	Type-12PE
	4	1*4	GOSA904	GOSA204	GOSA404	GOSA304	GOSA104	4100	
	6	1*6	GOSA906	GOSA206	GOSA406	GOSA306	GOSA106	4100	
	8	1*8	GOSA908	GOSA208	GOSA408	GOSA308	GOSA108	4100	
	12	1*12	GOSA912	GOSA212	GOSA412	GOSA312	GOSA112	4100	
<b>Outdoor Central tube (3.2 mm) cables</b> with improved Rodent Protection  (not listed in catalog)	2	1*2	GORA902	GORA202	GORA402	GORA302	GORA102	4100	Type-12RP
	4	1*4	GORA904	GORA204	GORA404	GORA304	GORA104	4100	
	6	1*6	GORA906	GORA206	GORA406	GORA306	GORA106	4100	
	8	1*8	GORA908	GORA208	GORA408	GORA308	GORA108	4100	
	12	1*12	GORA912	GORA212	GORA412	GORA312	GORA112	4100	
<b>Aerial cables</b>  (not listed in catalog)	6	6*1	GASC906	GASC206	GASC406	GASC306	GASC106	2100	Type-36aerialPE
	12	6*2	GASC912	GASC212	GASC412	GASC312	GASC112	2100	
	24	6*4	GASC924	GASC224	GASC424	GASC324	GASC124	2100	
	36	6*6	GASC936	GASC236	GASC436	GASC336	GASC136	2100	
<b>Universal Central tube cables</b> with <b>Steel Wire Armouring</b>  (not listed in catalog)	4	1*4	GUWA904	GUWA204	GUWA404	GUWA304	GUWA104	4100	Type-xxLS(SWA)
	6	1*6	GUWA906	GUWA206	GUWA406	GUWA306	GUWA106	4100	
	8	1*8	GUWA908	GUWA208	GUWA408	GUWA308	GUWA108	4100	
	12	1*12	GUWA912	GUWA212	GUWA412	GUWA312	GUWA112	4100	
	24	1*24	GUWB924	GUWB224	GUWB424	GUWB324	GUWB124	2100	
<b>Outdoor Central tube cables</b> with <b>Steel Wire Armouring</b>  (not listed in catalog)	4	1*4	GOWA904	GOWA204	GOWA404	GOWA304	GOWA104	4100	Type-xxPE(SWA)
	6	1*6	GOWA906	GOWA206	GOWA406	GOWA306	GOWA106	4100	
	8	1*8	GOWA908	GOWA208	GOWA408	GOWA308	GOWA108	4100	
	12	1*12	GOWA912	GOWA212	GOWA412	GOWA312	GOWA112	4100	
	24	1*24	GOWB924	GOWB224	GOWB424	GOWB324	GOWB124	2100	

Belden produce a wide variety of products, for products without part numbers or those not currently listed, please do not hesitate to contact Belden with your enquiry.

## European Partnumber Coding

1	2	3	4	5	6 – 7				
<b>G</b>	<b>I</b>	<i>Indoor</i>	<b>S</b>	<i>Stand. RP</i>	<b>T</b>	<i>Tight</i>	<b>1</b>	<i>62.5/125-OM1</i>	<b>Fibre-count</b> <b>(144 = 44)</b>
	<b>O</b>	<i>Outdoor</i>	<b>R</b>	<i>Impr. RP</i>	<b>S</b>	<i>Semi-tight</i>	<b>2</b>	<i>50/125-OM2</i>	
	<b>U</b>	<i>Universal</i>	<b>W</b>	<i>SWA</i>	<b>K</b>	<i>Dry semi-tight</i>	<b>3</b>	<i>50/125-OM3</i>	
	<b>A</b>	<i>Aerial</i>	<b>P</b>	<i>Patchcord</i>	<b>A</b>	<i>Central tube T12</i>	<b>4</b>	<i>50/125-OM2e</i>	
	<b>M</b>	<i>Mobile</i>	<b>B</b>	<i>Breakout</i>	<b>B</b>	<i>Central tube T24</i>			
			<b>M</b>	<i>Mini-Breakout</i>	<b>C</b>	<i>Multi-tube T48</i>			
			<b>X</b>	<i>Mini-BO+RP</i>	<b>D</b>	<i>Multi-tube T72</i>	<b>9</b>	<i>9/125-OS1</i>	
			<b>O</b>	<i>Pigtail</i>	<b>E</b>	<i>Multi-tube T96</i>	<b>0</b>	<i>No fibre, APF</i>	
					<b>F</b>	<i>Multi-tube T144</i>			

# Universal (outdoor & indoor use)

[Back to Content](#)

**Multi-tube Optical Fibre Cables** • halogen-free, metal-free


## Application

- For [outdoor and indoor](#) use in structured (data) wiring systems such as [campus backbone](#), [building backbone \(riser\)](#) and/or horizontal cabling. Support all computer network applications such as [FDDI](#), [Gigabit Ethernet](#) and [ATM](#).
- For [outdoor and indoor](#) use in networks for telecom, cable TV and/or broadcast.
- [Easy to install](#) in ducts, tunnels, trenches and/or tubes (by means of compressed air or pulling wire). Suitable for [direct burial](#) (crush  $\leq 150$  N/cm).

## Key features

- These cables are [halogen-free](#) (= FRNC and LSNH) and therefore suitable for both outdoor and indoor use. Consequently [splicing can be avoided](#) and the installation gets [more cost-effective](#).
- [Installation friendly dry interstices](#) between the loose tubes.
- All dielectric cables with standard or [improved rodent protection](#).
- [Predicted life time > 30 years](#).

## Construction & dimensions

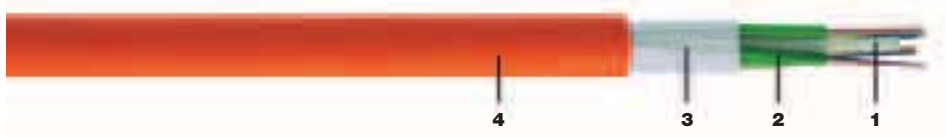

**Cable specifications** (construction in accordance with IEC 60794)

1. Dielectric central element of glass reinforced plastic (GRP), also [as protection against kinks](#), surrounded by swelling tape.
2. Jelly filled ([non dripping and silicon-free](#)) loose tubes with primary coated optical fibres ( $\text{Ø } 250 \pm 15 \mu\text{m}$ ). Individually colour coded optical fibres: red – natural – yellow – blue – green – violet – brown – black – orange – turquoise – pink and white. The loose tubes are stranded around the central element, if necessary with blind elements (black tubes without fibres). Colour coding of the loose tubes: 1. red – 2. white – rest blue (62.5/125) or green (50/125) or yellow (9/125)
3. Swellable yarns as strength members and for the [longitudinal watertightness](#).  
With improved rodent protection: halogen-free inner jacket + polyamid (nylon) layer + halogen-free outer jacket.
4. [Orange](#) halogen-free (FRNC/LSNH) outer jacket.  
Identification: BELDEN OFC – “cable type” – “number x type of fibre” + date-, meter- and P/N-marking.

### Mechanical data

No. of fibres	24	36	48	24	48	72	96	144
	type-48dc			type-72dc			type-96dc	type-144dc
Cable core	6 x 4	6 x 6	6 x 8	2 x 12	4 x 12	6 x 12	8 x 12	12 x 12
Ø Central element (mm)	2.1			2.6			2.6/4.3	3.5/7.6
Ø Loose tube (mm)	2.1			2.6			2.6	2.6
<b>Type-xxdcNH</b>	<b>with standard rodent protection</b>							
Ø nom./max. (mm)	9.8/10.1			11.0/11.3			12.7/13.0	16.0/16.3
Weight (kg/km)	107			130			167	255
Energy of flame (kJ/m)	1470			1945			2391	3427
<b>Type-xxdcHR</b>	<b>with improved rodent protection</b>							
Ø nom./max. (mm)	12.8/13.1			14.0/14.3			15.7/16.0	19.0/19.3
Weight (kg/km)	176			216			269	369
Energy of flame (kJ/m)	2807			3461			4147	4896

### Options

- Outdoor cables with a PE outerjacket.
- [Non-standard cable constructions like different types of fibres in one cable](#), colours, details and/or additional information regarding specifications are available on request.

The right to carry out technical modifications is reserved by the manufacturer.





# Universal (outdoor & indoor use)

[Back to Content](#)

**Multi-tube Optical Fibre Cables** • halogen-free, metal-free

## Optical characteristics

**Characteristics (cabled) Multi-Mode (MM) Graded-Index (GI) optical fibres according to IEC 60793**

Fibre-type	Size (µm)	Wavelength (nm)	Attenuation average / max. (dB/km)	Bandwidth (MHz x km)	Ethernet Performance (m)		Refractive Index
					1 GbE	10 GbE	
<b>62.5 / 125 OM1</b>	62.5 ± 2.5	850	3.0/3.2	≥ 200	275	33	1.495
<b>50 / 125 OM2</b>	50 ± 2.5	850	2.5/2.7	≥ 600	550	n.a.	1.481
<b>50 / 125 OM2e</b>	50 ± 2.5	850	2.5/2.7	≥ 1200	550	n.a.	1.476
<b>50 / 125 OM3</b>	50 ± 2.5	850	2.5/2.7	≥ 600	750	110	1.481
	125 ± 1	1300	0.5/0.8	≥ 1200	2000	n.a.	1.476
	125 ± 1	1300	0.5/0.8	≥ 1500	900	300	1.482
	125 ± 1	1300	0.5/0.8	≥ 500	550	n.a.	1.477

Fibres with enhanced Gigabit Ethernet performance on request available.

**Characteristics (cabled) Single-Mode (SM) Matched-Cladded (MC) optical fibres according to ITU-G.652B**

Fibre-type	Size (µm)	Wavelength (nm)	Attenuation average/max. (dB/km)	Dispersion (ps/(nm x km))	PMD (ps/√km)	Refractive Index
<b>9/125 OS1</b>	9.2 ± 0.4	1310	0.33/0.38	≤ 3.5		1.467
	125 ± 1	1550	0.20/0.25	≤ 18	≤ 0.2	1.467

A test report (attenuation) is supplied with each delivery.

## Mechanical, physical and/or environmental

- Temperature range** according to IEC 60794-1-2-F1
  - Transport/storage -30 to +70 °C
  - Installation -5 to +50 °C
  - Operation -30 to +70 °C
- Watertightness** according to IEC 60794-1-2-F5
- Pulling tension** according to IEC 60794-1-2-E1
  - Type-48 and Type-72 ≤ 3000 N
  - Type-96 and Type-144 ≤ 4000 N
- Crush resistance** according to IEC 60794-1-2-E3
  - Loose tube ≤ 4000 N/m
  - Type-48 and Type-72 ≤ 15000 N/m
  - Type-96 and Type-144 ≤ 20000 N/m
- Bending radii for fibres and tubes**
  - Installation/operation > 25 mm
- Bending radii cable**
  - Static according to IEC 60794-1-2-E11 – 10 x Ø
  - Dynamic according to IEC 60794-1-2-E6 – 15 x Ø
- Halogen-free** according to IEC 60754-2 (HD 602)
  - Corrosivity pH ≥ 3.5 – µS/cm ≤ 100
- Flame retardancy** according to IEC 60332-3C

- When laying and installing optical fibre cables [it is vitally important not to exceed the specified values](#) set for pulling tension, bending radii and temperature. The installation methods have to be in accordance with the common standards.
- To ease insertion into tubes by means of compressed air or pulling wire, certified lubricants (e.g. paraffin) may be used. The use of soap or similar substances as lubricants is strictly prohibited.
- If a cable needs to be fastened, constrictions ≥ 1 mm must be prevented.
- The jelly filling inside the tubes can be removed using a tissue soaked in turpentine.
- It is advisable to cap the cable-ends during storage.

- With standard rodent protection: Type-48dcNH, Type-72 dcNH, Type-96dcNH or Type-144 dcNH + fibre-count x fibre-type(s)
- With improved rodent protection: Type-48dcCHR, Type-72dcCHR, Type-96dcCHR or Type-144dcCHR + fibre-count x fibre-type(s)

Standard delivery lengths: Type-48: 4100 ± 100 m. Type-72, -96 and -144: 2100 ± 100 m.

On request available: Type-48: 5000 ± 100 m. Type-72, -96 and -144: 3000 ± 100 m.

# Universal (outdoor & indoor use)

[Back to Content](#)

**Central tube Optical Fibre Cables** • halogen-free, metal-free, max. 24 fibres


## Application

- For [outdoor and indoor](#) use in structured (data) wiring systems such as [campus backbone](#), [building backbone \(riser\)](#) and/or horizontal cabling. Support all computer network applications such as [FDDI](#), [Gigabit Ethernet](#) and [ATM](#).
- For [outdoor and indoor](#) use in networks for telecom, cable TV and/or broadcast.
- [Easy to install](#) in ducts, tunnels, trenches and/or tubes (by means of compressed air or pulling wire). Suitable for [direct burial](#) (crush  $\leq 150$  N/cm).

## Key features

- A simple cable construction (and [consequently more cost-effective up to 24 fibres](#) than multi-tube cables) with standard or improved rodent protection.
- These cables are all dielectric and therefore immune to lightning and electromagnetic interference (EMC-safe), spark-free and require no earthing.
- [Predicted life time > 30 years](#).

## Construction & dimensions

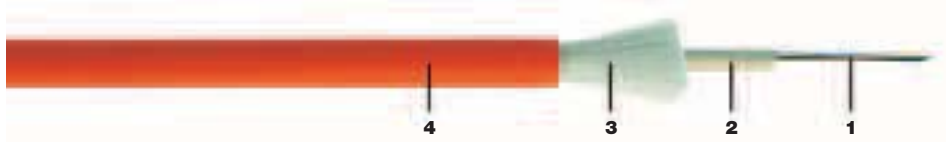

**Cable specifications** (construction in accordance with IEC 60794)

1. Primary coated optical fibres:  $\varnothing 250 \pm 15 \mu\text{m}$ .
2. Central tube, jelly filled ([non dripping and silicon-free](#)) with [up to 24 fibres](#).  
Individually colour coded optical fibres:  
1 – 12: red – natural – yellow – blue – green – violet – brown – black – orange – turquoise – pink and white  
13 – 24: red – natural – yellow – blue – green – violet – brown – grey – orange – turquoise – pink and white [with black rings](#).
3. Swellable yarns as strength members and for the [longitudinal watertightness](#).  
With improved rodent protection: + extra swellable yarns.
4. [Orange](#) halogen-free (FRNC/LSNH) outer jacket.  
Identification: BELDEN OFC – “cable type” – “number x type of fibre” + date-, meter- and P/N-marking.

### Mechanical data

No. of fibres	4	8	12	24
$\varnothing$ Central tube (mm)	4.2			
<b>with standard rodent protection</b>				
$\varnothing$ nom./max. (mm)	8.7/9.0			
Weight (kg/km)	72			
Energy of flame (kJ/m)	1370			
<b>with improved rodent protection</b>				
$\varnothing$ nom./max. (mm)	10.2/10.5			
Weight (kg/km)	104			
Energy of flame (kJ/m)	1680			

### Options

- Cables from [1 to 24 fibres](#).
- Cables with a PE jacket for outdoor use.
- [Non-standard cable constructions](#), colours, details and/or additional information regarding specifications are available on request.

The right to carry out technical modifications is reserved by the manufacturer.



# Universal (outdoor & indoor use)

[Back to Content](#)

**Central tube Optical Fibre Cables** • halogen-free, metal-free, max. 24 fibres

## Optical characteristics

**Characteristics (cabled) Multi-Mode (MM) Graded-Index (GI) optical fibres according to IEC 60793**

Fibre-type	Size (µm)	Wavelength (nm)	Attenuation average / max. (dB/km)	Bandwidth (MHz x km)	Ethernet Performance (m)		Refractive Index
					1 GbE	10 GbE	
<b>62.5 / 125 OM1</b>	62.5 ± 2.5	850	3.0/3.2	≥ 200	275	33	1.495
<b>50 / 125 OM2</b>	50 ± 2.5	850	2.5/2.7	≥ 600	550	n.a.	1.481
<b>50 / 125 OM2e</b>	50 ± 2.5	850	2.5/2.7	≥ 600	750	110	1.481
<b>50 / 125 OM3</b>	50 ± 2.5	850	2.5/2.7	≥ 1500	900	300	1.482
	125 ± 1	1300	0.6/0.8	≥ 600	550	n.a.	1.490
	125 ± 1	1300	0.5/0.8	≥ 1200	550	n.a.	1.476
	125 ± 1	1300	0.5/0.8	≥ 1200	2000	n.a.	1.476
	125 ± 1	1300	0.5/0.8	≥ 500	550	n.a.	1.477

Fibres with enhanced Gigabit Ethernet performance on request available.

**Characteristics (cabled) Single-Mode (SM) Matched-Cladded (MC) optical fibres according to ITU-G.652B**

Fibre-type	Size (µm)	Wavelength (nm)	Attenuation average / max. (dB/km)	Dispersion (ps/(nm x km))	PMD (ps/√km)	Refractive Index
<b>9/125 OS1</b>	9.2 ± 0.4	1310	0.33/0.38	≤ 3.5		1.467
	125 ± 1	1550	0.20/0.25	≤ 18	≤ 0.2	1.467

A test report (attenuation) is supplied with each delivery.

## Mechanical, physical and/or environmental

- Temperature range** according to IEC 60794-1-2-F1
  - Transport/storage -30 to +70 °C
  - Installation -5 to +50 °C
  - Operation -30 to +70 °C
- Watertightness** according to IEC 60794-1-2-F5
- Pulling tension** according to IEC 60794-1-2-E1
  - with standard RP ≤ 1400 N
  - with improved RP ≤ 4000 N
- Crush resistance** according to IEC 60794-1-2-E3
  - Cable ≤ 15000 N/m
- Bending radii for fibres and tubes**
  - Installation/operation > 25 mm
- Bending radii cable**
  - Static according to IEC 60794-1-2-E11 – 10 x Ø
  - Dynamic according to IEC 60794-1-2-E6 – 15 x Ø
- Halogen-free** according to IEC 60754-2 (HD 602)
  - Corrosivity pH ≥ 3.5 – µS/cm ≤ 100
- Flame retardancy** according to IEC 60332-3C

- When laying and installing optical fibre cables [it is vitally important not to exceed the specified values](#) set for pulling tension, bending radii and temperature. The installation methods have to be in accordance with the common standards.
- To ease insertion into tubes by means of compressed air or pulling wire, certified lubricants (e.g. paraffin) may be used. The use of soap or similar substances as lubricants is strictly prohibited.
- If a cable needs to be fastened, constrictions ≥ 0.3 mm must be prevented.
- The jelly filling inside the tubes can be removed using a tissue soaked in turpentine.
- It is advisable to cap the cable-ends during storage.

- With standard rodent protection: Type-24NH + fibre-count x fibre-type(s)
- With improved rodent protection: Type-24HR + fibre-count x fibre-type(s)

Standard delivery lengths: 2100 ± 100 m

# Universal (outdoor & indoor use)

[Back to Content](#)

**Central tube Optical Fibre Cables** • halogen-free, metal-free, max. 12 fibres


## Application

- For [outdoor and indoor](#) use in structured (data) wiring systems such as [campus backbone](#), [building backbone \(riser\)](#) and/or horizontal cabling. Support all computer network applications such as [FDDI](#), [Gigabit Ethernet](#) and [ATM](#).
- For [outdoor and indoor](#) use in networks for telecom, cable TV and/or broadcast.
- [Easy to install](#) in ducts, tunnels, trenches. Suitable for [direct burial](#) as long as the crush  $\leq 100$  N/cm.

## Key features

- These cables are [halogen-free](#) (= FRNC and LSNH) and therefore suitable for both outdoor and indoor use. Consequently [splicing can be avoided](#) and the installation gets [more cost-effective](#).
- A simple cable construction (and [consequently more cost-effective up to 12 fibres](#) than multi-tube cables) with standard or improved rodent protection.
- These cables are all dielectric and therefore immune to lightning and electromagnetic interference (EMC-safe), spark-free and require no earthing.
- [Predicted life time > 30 years](#).

## Construction & dimensions

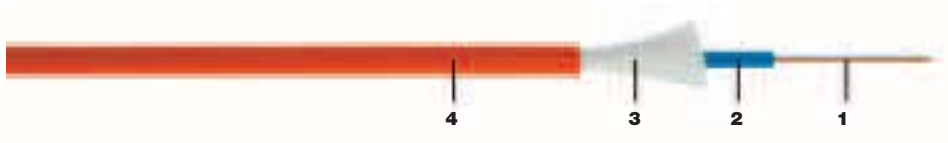

**Cable specifications** (construction in accordance with IEC 60794)

1. Primary coated optical fibres:  $\text{Ø } 250 \pm 15 \mu\text{m}$ .
2. Central tube, jelly filled ([non dripping and silicon-free](#)) with [up to 12 fibres](#).  
Individually colour coded optical fibres: red – natural – yellow – blue – green – violet – brown – black – orange – turquoise – pink and white.
3. Swellable yarns as strength members and for the [longitudinal watertightness](#).  
With improved rodent protection: + extra swellable yarns.
4. [Orange](#) halogen-free (FRNC/LSNH) outer jacket.  
Identification: BELDEN OFC – “cable type” – “number x type of fibre” + date-, meter- and P/N-marking.

### Mechanical data

No. of fibres	4	8	12
Ø Central tube (mm)	3.2		
<b>with standard rodent protection</b>			
Ø nom./max. (mm)	5.8 / 6.1		
Weight (kg/km)	37		
Energy of flame (kJ/m)	550		
<b>with improved rodent protection</b>			
Ø nom./max. (mm)	7.1 / 7.4		
Weight (kg/km)	55		
Energy of flame (kJ/m)	755		

### Options

- Cables from [1 to 12 fibres](#).
- Outdoor cables with a black PE outer jacket.
- [Non-standard cable constructions](#), colours, details and/or additional information regarding specifications are available on request.

The right to carry out technical modifications is reserved by the manufacturer.



# Universal (outdoor & indoor use)

[Back to Content](#)

**Central tube Optical Fibre Cables** • halogen-free, metal-free, max. 12 fibres

## Optical characteristics

**Characteristics (cabled) Multi-Mode (MM) Graded-Index (GI) optical fibres according to IEC 60793**

Fibre-type	Size (µm)	Wavelength (nm)	Attenuation average / max. (dB/km)	Bandwidth (MHz x km)	Ethernet Performance (m)		Refractive Index
					1 GbE	10 GbE	
<b>62.5 / 125 OM1</b>	62.5 ± 2.5 125 ± 1	850 1300	3.0/3.2 0.6/0.8	≥ 200 ≥ 600	275 550	33 n.a.	1.495 1.490
<b>50 / 125 OM2</b>	50 ± 2.5 125 ± 1	850 1300	2.5/2.7 0.5/0.8	≥ 600 ≥ 1200	550 550	82 n.a.	1.481 1.476
<b>50 / 125 OM2e</b>	50 ± 2.5 125 ± 1	850 1300	2.5/2.7 0.5/0.8	≥ 600 ≥ 1200	750 2000	110 n.a.	1.481 1.476
<b>50 / 125 OM3</b>	50 ± 2.5 125 ± 1	850 1300	2.5/2.7 0.5/0.8	≥ 1500 ≥ 500	900 550	300 n.a.	1.482 1.477

Fibres with enhanced Gigabit Ethernet performance on request available.

**Characteristics (cabled) Single-Mode (SM) Matched-Cladded (MC) optical fibres according to ITU-G.652B**

Fibre-type	Size (µm)	Wavelength (nm)	Attenuation average / max. (dB/km)	Dispersion (ps/(nm x km))	PMD (ps/√km)	Refractive Index
<b>9/125 OS1</b>	9.2 ± 0.4 125 ± 1	1310 1550	0.33/0.38 0.20/0.25	≤ 3.5 ≤ 18	≤ 0.2	1.467 1.467

A test report (attenuation) is supplied with each delivery.

## Mechanical, physical and/or environmental

<p>■ <b>Temperature range</b> according to IEC 60794-1-2-F1</p> <p>Transport/storage -30 to +70 °C</p> <p>Installation -5 to +50 °C</p> <p>Operation -30 to +70 °C</p>	<p>■ <b>Watertightness</b> according to IEC 60794-1-2-F5</p>
<p>■ <b>Pulling tension</b> according to IEC 60794-1-2-E1</p> <p>with standard RP ≤ 700 N</p> <p>with improved RP ≤ 1400 N</p>	<p>■ <b>Crush resistance</b> according to IEC 60794-1-2-E3</p> <p>Central tube and cable ≤ 10000 N/m</p>
<p>■ <b>Bending radii for fibres and tubes</b></p> <p>Installation/operation &gt; 25 mm</p>	<p>■ <b>Bending radii cable</b></p> <p>Static according to IEC 60794-1-2-E11 – 10 x Ø</p> <p>Dynamic according to IEC 60794-1-2-E6 – 15 x Ø</p>
<p>■ <b>Halogen-free</b> according to IEC 60754-2 (HD 602)</p> <p>Corrosivity pH ≥ 3.5 – µS/cm ≤ 100</p>	<p>■ <b>Flame retardancy</b> according to IEC 60332-3C</p>

- When laying and installing optical fibre cables [it is vitally important not to exceed the specified values](#) set for pulling tension, bending radii and temperature. The installation methods have to be in accordance with the common standards.
- To ease insertion into tubes by means of compressed air or pulling wire, certified lubricants (e.g. paraffin) may be used. The use of soap or similar substances as lubricants is strictly prohibited.
- If a cable needs to be fastened, constrictions ≥ 0.3 mm must be prevented.
- The jelly filling inside the tubes can be removed using a tissue soaked in turpentine.
- It is advisable to cap the cable-ends during storage.

- With standard rodent protection: Type-12NH + fibre-count x fibre-type(s)
- With improved rodent protection: Type-12HR + fibre-count x fibre-type(s)

Standard delivery lengths: 4100 ± 100 m

# Outdoor

[Back to Content](#)

## Multi-tube Optical Fibre Cables • metal-free


### Application

- For [outdoor](#) use in structured (data) wiring systems ([campus backbone](#)). Support all computer network applications such as [FDDI](#), [Gigabit Ethernet](#) and [ATM](#).
- For [outdoor](#) use in networks for telecom, cable TV and/or broadcast.
- [Easy to install](#) in ducts, tunnels, trenches and/or tubes (by means of compressed air or pulling wire). Suitable for [direct burial](#) (crush  $\leq 150$  N/cm).

### Key features

- These cables are all dielectric and therefore immune to lightning and electromagnetic interference (EMC-safe), spark-free and require no earthing.
- [Installation friendly dry interstices](#) between the loose tubes.
- All dielectric cables with standard or [improved rodent protection](#).
- [Predicted life time > 30 years](#).

### Construction & dimensions

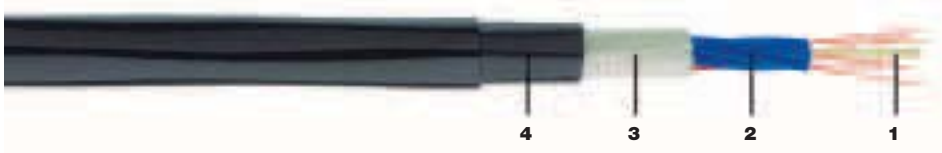

**Cable specifications** (construction in accordance with IEC 60794)

1. Dielectric central element of glass reinforced plastic (GRP), also [as protection against kinks](#), surrounded by swelling tape.
2. Jelly filled ([non dripping and silicon-free](#)) loose tubes with primary coated optical fibres ( $\varnothing 250 \pm 15 \mu\text{m}$ ). Individually colour coded optical fibres: red – natural – yellow – blue – green – violet – brown – black – orange – turquoise – pink and white. The loose tubes are stranded around the central element, if necessary with blind elements (black tubes without fibres). Colour coding of the loose tubes: 1. red – 2. white – rest blue (62.5/125) or green (50/125) or yellow (9/125)
3. Swellable yarns as strength members and for the [longitudinal watertightness](#).
4. Standard rodent protection: black UV-resistant outer jacket (PE). [Improved rodent protection](#): PE inner jacket + black nylon outer jacket. Identification: BELDEN OFC – “cable type” – “number x type of fibre” + date-, meter- and P/N-marking.

### Mechanical data

No. of fibres	24	36	48	24	48	72	96	144
	type-48dc			type-72dc			type-96dc	type-144dc
Cable core	6 x 4	6 x 6	6 x 8	2 x 12	4 x 12	6 x 12	8 x 12	12 x 12
Ø Central element (mm)	2.1			2.6			2.6/4.3	3.5/7.6
Ø Loose tube (mm)	2.1			2.6			2.6	2.6
<b>Type-xxdcPE</b>	<b>with standard rodent protection</b>							
Ø nom./max. (mm)	9.8/10.1			11.0/11.3			12.7/13.0	16.0/16.3
Weight (kg/km)	75			101			147	210
Energy of flame (kJ/m)	2300			2930			3554	4827
<b>Type-xxdcRP</b>	<b>with improved rodent protection</b>							
Ø nom./max. (mm)	11.4/11.7			12.6/12.9			14.3/14.6	17.6/17.9
Weight (kg/km)	103			130			182	252
Energy of flame (kJ/m)	3187			3916			4684	6232

### Options

- Halogen-free (FRNC/LSNH) cables.
- [Non-standard cable constructions like different types of fibres in one cable](#), colours, details and/or additional information regarding specifications are available on request.

The right to carry out technical modifications is reserved by the manufacturer.



# Outdoor

[Back to Content](#)

## Multi-tube Optical Fibre Cables • metal-free

### Optical characteristics

Characteristics (cabled) Multi-Mode (MM) Graded-Index (GI) optical fibres according to IEC 60793

Fibre-type	Size (µm)	Wavelength (nm)	Attenuation average / max. (dB/km)	Bandwidth (MHz x km)	Ethernet Performance (m)		Refractive Index
					1 GbE	10 GbE	
<b>62.5 / 125 OM1</b>	62.5 ± 2.5	850	3.0/3.2	≥ 200	275	33	1.495
<b>50 / 125 OM2</b>	50 ± 2.5	850	2.5/2.7	≥ 600	550	n.a.	1.481
<b>50 / 125 OM2e</b>	50 ± 2.5	850	2.5/2.7	≥ 600	750	110	1.481
<b>50 / 125 OM3</b>	50 ± 2.5	850	2.5/2.7	≥ 1500	900	300	1.482
	125 ± 1	1300	0.6/0.8	≥ 600	550	n.a.	1.490
	125 ± 1	1300	0.5/0.8	≥ 1200	550	n.a.	1.476
	125 ± 1	1300	0.5/0.8	≥ 1200	2000	n.a.	1.476
	125 ± 1	1300	0.5/0.8	≥ 500	550	n.a.	1.477

Fibres with enhanced Gigabit Ethernet performance on request available.

Characteristics (cabled) Single-Mode (SM) Matched-Cladded (MC) optical fibres according to ITU-G.652B

Fibre-type	Size (µm)	Wavelength (nm)	Attenuation average / max. (dB/km)	Dispersion (ps/(nm x km))	PMD (ps/√km)	Refractive Index
<b>9/125 OS1</b>	9.2 ± 0.4	1310	0.33/0.38	≤ 3.5		1.467
	125 ± 1	1550	0.20/0.25	≤ 18	≤ 0.2	1.467

A test report (attenuation) is supplied with each delivery.

### Mechanical, physical and/or environmental

- Temperature range** according to IEC 60794-1-2-F1
  - Transport/storage -30 to +70 °C
  - Installation -5 to +50 °C
  - Operation -30 to +70 °C
- Watertightness** according to IEC 60794-1-2-F5
- Pulling tension** according to IEC 60794-1-2-E1
  - Type-48 and Type-72 ≤ 3000 N
  - Type-96 and Type-144 ≤ 4000 N
- Crush resistance** according to IEC 60794-1-2-E3
  - Loose tube ≤ 4000 N/m
  - Type-48 and Type-72 ≤ 15000 N/m
  - Type-96 and Type-144 ≤ 20000 N/m
- Bending radii for fibres and tubes**
  - Installation/operation > 25 mm
- Bending radii cable**
  - Static according to IEC 60794-1-2-E11 – 10 x Ø
  - Dynamic according to IEC 60794-1-2-E6 – 15 x Ø

- When laying and installing optical fibre cables [it is vitally important not to exceed the specified values](#) set for pulling tension, bending radii and temperature. The installation methods have to be in accordance with the common standards.
- To ease insertion into tubes by means of compressed air or pulling wire, certified lubricants (e.g. paraffin) may be used. The use of soap or similar substances as lubricants is strictly prohibited.
- If a cable needs to be fastened, constrictions ≥ 1 mm must be prevented.
- The jelly filling inside the tubes can be removed using a tissue soaked in turpentine.
- It is advisable to cap the cable-ends during storage.

- With standard rodent protection: Type-48dcPE, Type-72dcPE, Type-96dcPE or Type-144dcPE + fibre-count x fibre-type(s)
- With improved rodent protection: Type-48dcRP, Type-72dcRP, Type-96dcRP or Type-144dcRP + fibre-count x fibre-type(s)

Standard delivery lengths: Type-48: 4100 ± 100 m. Type-72, -96 and -144: 2100 ± 100 m.  
 On request available: Type-48: 5000 ± 100 m. Type-72, -96 and -144: 3000 ± 100 m.

# Outdoor

[Back to Content](#)

## Central tube Optical Fibre Cables • metal-free, max. 24 fibres


### Application

- For [outdoor](#) use in structured (data) wiring systems ([campus backbone](#)). Support all computer network applications such as [FDDI](#), [Gigabit Ethernet](#) and [ATM](#).
- For [outdoor](#) use in networks for telecom, cable TV and/or broadcast.
- [Easy to install](#) in ducts, tunnels, trenches and/or tubes (by means of compressed air or pulling wire). Suitable for [direct burial](#) (crush  $\leq 150$  N/cm).

### Key features

- A simple cable construction (and [consequently more cost-effective up to 24 fibres](#) than multi-tube cables) with standard or improved rodent protection.
- These cables are all dielectric and therefore immune to lightning and electromagnetic interference (EMC-safe), spark-free and require no earthing.
- [Predicted life time > 30 years](#).

### Construction & dimensions

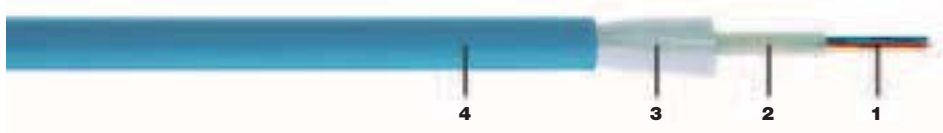

**Cable specifications** (construction in accordance with IEC 60794)

1. Primary coated optical fibres:  $\text{Ø } 250 \pm 15 \mu\text{m}$ .
2. Central tube, jelly filled ([non dripping and silicon-free](#)) with [up to 24 fibres](#).  
Individually colour coded optical fibres:  
1 – 12: red – natural – yellow – blue – green – violet – brown – black – orange – turquoise – pink and white  
13 – 24: red – natural – yellow – blue – green – violet – brown – grey – orange – turquoise – pink and white [with black rings](#).
3. Swellable yarns as strength members and for the [longitudinal watertightness](#).  
With improved rodent protection: + extra swellable yarns.
4. UV resistant PE outer jacket.  
Black: standard rodent protection (RP) or  
[Blue: Blueight \(improved rodent protection\)](#).  
Identification: BELDEN OFC – “cable type” – “number x type of fibre” + date-, meter- and P/N-marking.

### Mechanical data

No. of fibres	4	8	12	24
Ø Central tube (mm)	4.2			
<b>with standard rodent protection</b>				
Ø nom./max. (mm)	8.7/9.0			
Weight (kg/km)	66			
Energy of flame (kJ/m)	1700			
<b>with improved rodent protection</b>				
Ø nom./max. (mm)	10.2/10.5			
Weight (kg/km)	96			
Energy of flame (kJ/m)	2200			

### Options

- Cables from [1 to 24 fibres](#).
- Halogen-free cables for outdoor and/or indoor use.
- [Non-standard cable constructions](#), colours, details and/or additional information regarding specifications are available on request.

The right to carry out technical modifications is reserved by the manufacturer.





# Outdoor

[Back to Content](#)

## Central tube Optical Fibre Cables • metal-free, max. 24 fibres

### Optical characteristics

#### Characteristics (cabled) Multi-Mode (MM) Graded-Index (GI) optical fibres according to IEC 60793

Fibre-type	Size (µm)	Wavelength (nm)	Attenuation average / max. (dB/km)	Bandwidth (MHz x km)	Ethernet Performance (m)		Refractive Index
					1 GbE	10 GbE	
<b>62.5 / 125 OM1</b>	62.5 ± 2.5	850	3.0/3.2	≥ 200	275	33	1.495
<b>50 / 125 OM2</b>	50 ± 2.5	850	2.5/2.7	≥ 600	550	n.a.	1.481
<b>50 / 125 OM2e</b>	50 ± 2.5	850	2.5/2.7	≥ 600	750	110	1.481
<b>50 / 125 OM3</b>	50 ± 2.5	850	2.5/2.7	≥ 1500	900	300	1.482
	125 ± 1	1300	0.6/0.8	≥ 600	550	n.a.	1.490
	125 ± 1	1300	0.5/0.8	≥ 1200	550	n.a.	1.476
	125 ± 1	1300	0.5/0.8	≥ 1200	2000	n.a.	1.476
	125 ± 1	1300	0.5/0.8	≥ 500	550	n.a.	1.477

Fibres with enhanced Gigabit Ethernet performance on request available.

#### Characteristics (cabled) Single-Mode (SM) Matched-Cladded (MC) optical fibres according to ITU-G.652B

Fibre-type	Size (µm)	Wavelength (nm)	Attenuation average / max. (dB/km)	Dispersion (ps/(nm x km))	PMD (ps/√km)	Refractive Index
<b>9/125 OS1</b>	9.2 ± 0.4	1310	0.33/0.38	≤ 3.5		1.467
	125 ± 1	1550	0.20/0.25	≤ 18	≤ 0.2	1.467

A test report (attenuation) is supplied with each delivery.

### Mechanical, physical and/or environmental

- Temperature range** according to IEC 60794-1-2-F1
  - Transport/storage -30 to +70 °C
  - Installation -5 to +50 °C
  - Operation -30 to +70 °C
- Watertightness** according to IEC 60794-1-2-F5
- Pulling tension** according to IEC 60794-1-2-E1
  - with standard RP ≤ 1400 N
  - with improved RP ≤ 4000 N
- Crush resistance** according to IEC 60794-1-2-E3
  - Cable ≤ 15000 N/m
- Bending radii for fibres and tubes**
  - Installation/operation > 25 mm
- Bending radii cable**
  - Static according to IEC 60794-1-2-E11 – 10 x Ø
  - Dynamic according to IEC 60794-1-2-E6 – 15 x Ø
- When laying and installing optical fibre cables [it is vitally important not to exceed the specified values](#) set for pulling tension, bending radii and temperature. The installation methods have to be in accordance with the common standards.
  - To ease insertion into tubes by means of compressed air or pulling wire, certified lubricants (e.g. paraffin) may be used. The use of soap or similar substances as lubricants is strictly prohibited.
  - If a cable needs to be fastened, constrictions ≥ 0.3 mm must be prevented.
  - The jelly filling inside the tubes can be removed using a tissue soaked in turpentine.
  - It is advisable to cap the cable-ends during storage.
- With standard rodent protection: Type-24PE + fibre-count x fibre-type(s)
  - With improved rodent protection: Type-24RP (bluelight) + fibre-count x fibre-type(s)

Standard delivery lengths: 2100 ± 100 m

# Intex (for internal & external use)

[Back to Content](#)

**Mini-Breakout (Distribution) Optical Fibre Cables • halogen-free, metal-free**

## Application

- Structured (premises) wiring systems: [campus and/or building backbone \(riser\) and/or horizontal cabling](#).
- Support all computer network applications such as [FDDI, Gigabit Ethernet and ATM](#).
- [Easy to install](#) in ducts, tunnels and trenches. Not recommended for direct burial.

## Key features

- These cables are halogen-free (= FRNC and LSNH) and watertight and therefore suitable for internal and external (= intex) use. Consequently [splicing can be avoided](#) and the installation gets [more cost-effective](#).
- These cables are all dielectric and therefore immune to lightning and electromagnetic interference (EMC-safe), spark-free and require no earthing.
- [Predicted life time > 30 years](#).

## Construction & dimensions



**Cable specifications** (construction in accordance with IEC 60794)

- Swellable reinforced yarns as common strength members and for the longitudinal watertightness.
- Primary coated optical fibres:  $\text{Ø } 280 \pm 15 \mu\text{m}$ .
- Tight buffered fibres:  $\text{Ø } 0.9 \pm 0.1 \text{ mm}$ .  
Colour coding of the buffered fibres:  
white – red – blue – yellow – green – violet – brown – black – orange – turquoise – pink – grey  
of the fibres 1 – 12 the secondary coating is coloured  
of the fibres 13 – 24 the primary coating is coloured and the secondary coating is transparent.
- Swellable tape.
- [Orange](#) halogen-free (FRNC/LSNH) outer jacket.  
Identification: BELDEN OFC – INTEX-MINI-BREAKOUT – I/A-VQ(ZN)H – “number x type of fibre” + date-, meter- and P/N-marking.

### Mechanical data

No. of fibres	4	6	8	12	24
Ø nom. (mm)	5.4	5.9	5.9	7.6	9.6
Max. pulling tension (N)	400	450	450	500	600
Energy of flame (kJ/m)	296	347	371	622	1082
Weight (kg/km)	26	30	32	45	65

### Options

- Improved rodent protection by means of extra nylon outer jacket or extra glass rovings.
- Indoor Mini-Breakout with tight buffered fibres.
- Indoor Mini-Breakout with excellent strippable dry semi-tight buffered fibres.
- [Non-standard cable constructions](#), colours, details and/or additional information regarding specifications are available on request.

The right to carry out technical modifications is reserved by the manufacturer.



# Intex (for internal & external use)

[Back to Content](#)

## Mini-Breakout (Distribution) Optical Fibre Cables • halogen-free, metal-free

### Optical characteristics

#### Characteristics (cabled) Multi-Mode (MM) optical fibres according to IEC 60793

Fibre-type	Size (µm)	Wavelength (nm)	Attenuation average / max. (dB/km)	Bandwidth (MHz x km)	Ethernet Performance (m)		Refractive Index
					1 GbE	10 GbE	
<b>62.5 / 125 OM1</b>	62.5 ± 2.5 125 ± 1	850 1300	3.0/3.2 0.7/0.9	≥ 200 ≥ 600	275 550	33 n.a.	1.495 1.490
<b>50 / 125 OM2</b>	50 ± 2.5 125 ± 1	850 1300	2.6/2.8 0.6/0.9	≥ 600 ≥ 1200	550 550	82 n.a.	1.481 1.476
<b>50 / 125 OM2e</b>	50 ± 2.5 125 ± 1	850 1300	2.6/2.8 0.6/0.9	≥ 600 ≥ 1200	750 2000	110 n.a.	1.481 1.476
<b>50 / 125 OM3</b>	50 ± 2.5 125 ± 1	850 1300	2.6/2.8 0.6/0.9	≥ 1500 ≥ 500	900 550	300 n.a.	1.482 1.477

Fibres with enhanced Gigabit Ethernet performance on request available.

#### Characteristics (cabled) Single-Mode (SM) Matched-Cladded (MC) optical fibres according to ITU-G.652B

Fibre-type	Size (µm)	Wavelength (nm)	Attenuation average / max. (dB/km)	Dispersion (ps/(nm x km))	PMD (ps/√km)	Refractive Index
<b>9/125 patchcord quality</b>	9.2 ± 0.4 125 ± 0.5	1310 1550	0.35/0.5 0.21/0.3	≤ 3.5 ≤ 18	≤ 0.2	1.467 1.467

A test report (attenuation) is supplied with each delivery.

### Mechanical, physical and/or environmental

- Temperature range** according to IEC 60794-1-2-F1
  - Transport/storage -30 to +70 °C
  - Installation -5 to +50 °C
  - Operation -30 to +70 °C
- Strippability**
  - Secondary coating only ≤ 10 cm
  - Secondary + primary coating ≤ 10 mm
- Watertightness** according to IEC 60794-1-2-F5
- Pulling tension** according to IEC 60794-1-2-E1  
see table with dimensions
- Crush resistance** according to IEC 60794-1-2-E3
  - Tight buffer ≤ 4000 N/m
  - Cable ≤ 4000 N/m
- Bending radii for fibres and tubes**
  - Installation/operation > 25 mm
- Bending radii cable**
  - Static according to IEC 60794-1-2-E11 – 15 x Ø
  - Dynamic according to IEC 60794-1-2-E6 – 20 x Ø
- Halogen-free** according to IEC 60754-2 (HD 602)  
Corrosivity pH ≥ 3.5 – µS/cm ≤ 100
- Flame retardancy** according to IEC 60332-2

- When laying and installing optical fibre cables [it is vitally important not to exceed the specified values](#) set for pulling tension, bending radii and temperature. The installation methods have to be in accordance with the common standards.
- To ease insertion into tubes certified lubricants (e.g. paraffin) may be used. The use of soap or similar substances as lubricants is strictly prohibited.
- If a cable needs to be fastened, constrictions ≥ 0.3 mm must be prevented.
- It is advisable to cap the cable-ends during storage.

Intex Mini-Breakout + fibre-count x fibre-type

Standard delivery lengths: 2100 ± 100 m

# Indoor

[Back to Content](#)

## Mini-Breakout (Distribution) Optical Fibre Cables • halogen-free, metal-free


### Application

- Structured (premises) wiring systems: building backbone (riser) and/or [horizontal cabling \(Fibre To The Desk\)](#).
- Support all computer network applications such as [FDDI, Gigabit Ethernet and ATM](#).

### Key features

- These cables are halogen-free = FRNC (Flame Retardant, Non Corrosive) and LSNH (Low Smoke, Non Halogen).
- These cables are all dielectric and therefore immune to lightning and electromagnetic interference (EMC-safe), spark-free and require no earthing.
- [Predicted life time > 30 years.](#)

### Construction & dimensions

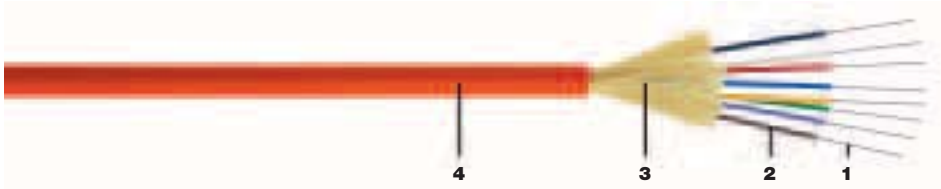

**Cable specifications** (construction in accordance with IEC 60794)

- Primary coated optical fibres:  $\text{Ø } 280 \pm 15 \text{ }\mu\text{m}$ .
- Tight buffered fibres:  $\text{Ø } 0.9 \pm 0.1 \text{ mm}$ .  
Colour coding of the buffered fibres:  
white – red – blue – yellow – green – violet – brown – black – orange – turquoise – pink – grey  
of the fibres 1 – 12 the secondary coating is coloured  
of the fibres 13 – 24 the primary coating is coloured and the secondary coating is transparent.
- Reinforced yarns as common strength members.
- [Orange](#) halogen-free (FRNC/LSNH) outer jacket.  
Identification: BELDEN OFC – FRNC MINI-BREAKOUT – I-V(ZN)H – “number x type of fibre” + date-, meter- and P/N-marking.

### Mechanical data

No. of fibres	2	4	6	8	12	16	24
Ø nom. (mm)	4.0	4.8	5.3	5.3	7.0	8.0	9.0
Max. pulling tension (N)	400	400	450	450	500	500	600
Energy of flame (kJ/m)	227	294	339	351	619	886	1044
Weight (kg/km)	16	19	23	25	40	49	57

### Options

- Indoor Mini-Breakout cables with excellent strippable dry semi-tight buffered fibres.
- Intex Mini-Breakout cables for internal and external use.
- [Non-standard cable constructions](#), colours, details and/or additional information regarding specifications are available on request.

The right to carry out technical modifications is reserved by the manufacturer.



# Indoor

[Back to Content](#)

## Mini-Breakout (Distribution) Optical Fibre Cables • halogen-free, metal-free

### Optical characteristics

Characteristics (cabled) Multi-Mode (MM) optical fibres according to IEC 60793

Fibre-type	Size (µm)	Wavelength (nm)	Attenuation average / max. (dB/km)	Bandwidth (MHz x km)	Ethernet Performance (m)		Refractive Index
					1 GbE	10 GbE	
<b>62.5 / 125 OM1</b>	62.5 ± 2.5 125 ± 1	850 1300	3.0/3.2 0.7/0.9	≥ 200 ≥ 600	275 550	33 n.a.	1.495 1.490
<b>50 / 125 OM2</b>	50 ± 2.5 125 ± 1	850 1300	2.6/2.8 0.6/0.9	≥ 600 ≥ 1200	550 550	82 n.a.	1.481 1.476
<b>50 / 125 OM2e</b>	50 ± 2.5 125 ± 1	850 1300	2.6/2.8 0.6/0.9	≥ 600 ≥ 1200	750 2000	110 n.a.	1.481 1.476
<b>50 / 125 OM3</b>	50 ± 2.5 125 ± 1	850 1300	2.6/2.8 0.6/0.9	≥ 1500 ≥ 500	900 550	300 n.a.	1.482 1.477

Fibres with enhanced Gigabit Ethernet performance on request available.

### Mechanical, physical and/or environmental

- Temperature range** according to IEC 60794-1-2-F1
  - Transport/storage -30 to +70 °C
  - Installation -5 to +50 °C
  - Operation -5 to +55 °C
- Strippability**
  - Secondary coating only ≤ 10 cm
  - Secondary + primary coating ≤ 10 mm
- Pulling tension** according to IEC 60794-1-2-E1
  - See table with dimensions
- Crush resistance** according to IEC 60794-1-2-E3
  - Tight buffer ≤ 4000 N/m
  - Cable ≤ 4000 N/m
- Bending radii for fibres and tight buffers**
  - Installation/operation > 25 mm
- Bending radii cable**
  - Static according to IEC 60794-1-2-E11 – 15 x Ø
  - Dynamic according to IEC 60794-1-2-E6 – 20 x Ø
- Halogen-free** according to IEC 60754-2 (HD 602)
  - Corrosivity pH ≥ 3.5 – µS/cm ≤ 100
- Flame retardancy** according to IEC 60332-2
  -

- When laying and installing optical fibre cables [it is vitally important not to exceed the specified values](#) set for pulling tension, bending radii and temperature. The installation methods have to be in accordance with the common standards.
- To ease insertion certified lubricants (e.g. paraffin) may be used. The use of soap or similar substances as lubricants is strictly prohibited.
- If a cable needs to be fastened, constrictions ≥ 0.3 mm must be prevented.

■ Indoor Mini-Breakout with tight buffered fibres + fibre-count x fibre-type

Standard delivery lengths: 2100 ± 100 m

# Indoor

[Back to Content](#)

## Breakout Optical Fibre Cables • halogen-free, metal-free


### Application

- Structured (premises) wiring systems: [building backbone \(riser\) and/or horizontal cabling](#).
- Support all computer network applications such as [FDDI, Gigabit Ethernet and ATM](#).
- [Easy to install](#) in ducts, tunnels and trenches.

### Key features

- The individual single fibre units (of which these metal-free breakout cables are composed) permit direct (detensioned) terminations with separate single-way connectors, which eliminate splicing of pigtails and/or breakout kits.
- These cables are halogen-free (= FRNC and LSNH) and metal-free (all dielectric).
- [Predicted life time > 30 years](#).

### Construction & dimensions

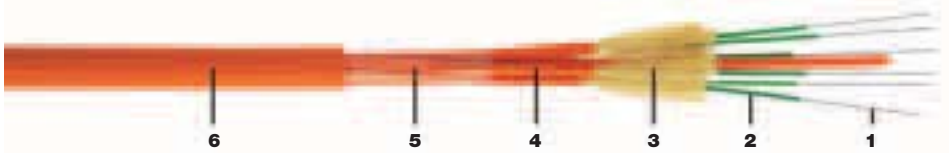

**Cable specifications** (construction in accordance with IEC 60794)

- Primary coated optical fibres:  $\text{Ø } 280 \pm 15 \mu\text{m}$ .
- Tight buffered fibres:  $\text{Ø } 0.9 \pm 0.1 \text{ mm}$ .
- Reinforced yarns as strength members.
- [Orange](#) halogen-free (FRNC/LSNH), numbered jacket ( $\text{Ø } 2.1 \pm 0.2 \text{ mm}$ ).
- Tape.
- [Orange](#) halogen-free (FRNC/LSNH) outer jacket with rip cord.  
Identification: BELDEN OFC – FRNC BREAKOUT – I-V(ZN)H-H – “number x type of fibre” + date-, meter- and P/N-marking.

### Mechanical data

No. of fibres	2	4	6	8	12	24
Cable core	2 + 2 BE	CE + 4	CE + 6	CE + 8	3 + 9	2 + 8 + 14
Ø nom. (mm)	5.3	6.2	8.0	9.4	10.5	14.3
Max. Pulling tension (N)	400	400	600	800	1200	2400
Energy of flame (kJ/m)	379	507	928	1235	1424	2677
Weight (kg/km)	25	31	59	77	87	175

BE = Blind Element, CE = Central Element

### Options

- Mixed fibre types.
- Breakout cables with excellent strippable dry semi-tight buffered fibres.
- Intex Breakout cables for indoor and/or outdoor use on request available.
- [Non-standard cable constructions](#), colours, details and/or additional information regarding specifications are available on request.

The right to carry out technical modifications is reserved by the manufacturer.



# Indoor

[Back to Content](#)

## Breakout Optical Fibre Cables • halogen-free, metal-free

### Optical characteristics

Characteristics (cabled) Multi-Mode (MM) optical fibres according to IEC 60793

Fibre-type	Size (µm)	Wavelength (nm)	Attenuation average / max. (dB/km)	Bandwidth (MHz x km)	Ethernet Performance (m)		Refractive Index
					1 GbE	10 GbE	
<b>62.5 / 125 OM1</b>	62.5 ± 2.5	850	3.0/3.2	≥ 200	275	33	1.495
<b>50 / 125 OM2</b>	50 ± 2.5	850	2.6/2.8	≥ 600	550	n.a.	1.481
<b>50 / 125 OM2e</b>	50 ± 2.5	850	2.6/2.8	≥ 600	750	110	1.481
<b>50 / 125 OM3</b>	50 ± 2.5	850	2.6/2.8	≥ 1500	900	300	1.482
	125 ± 1	1300	0.7/0.9	≥ 600	550	n.a.	1.490
	125 ± 1	1300	0.6/0.9	≥ 1200	550	n.a.	1.476
	125 ± 1	1300	0.6/0.9	≥ 1200	2000	n.a.	1.476
	125 ± 1	1300	0.6/0.9	≥ 500	550	n.a.	1.477

Fibres with enhanced Gigabit Ethernet performance on request available.

Characteristics (cabled) Single-Mode (SM) Matched-Cladded (MC) optical fibres according to ITU-G.652B

Fibre-type	Size (µm)	Wavelength (nm)	Attenuation average / max. (dB/km)	Dispersion (ps/(nm x km))	PMD (ps/√km)	Refractive Index
<b>9/125 patchcord quality</b>	9.2 ± 0.4	1310	0.35/0.5	≤ 3.5		1.467
	125 ± 0.5	1550	0.21/0.3	≤ 18	≤ 0.2	1.467

A test report (attenuation) is supplied with each delivery.

### Mechanical, physical and/or environmental

- Temperature range** according to IEC 60794-1-2-F1
  - Transport/storage -30 to +70 °C
  - Installation -5 to +50 °C
  - Operation -5 to +55 °C
- Strippability**
  - Secondary coating only ≤ 10 cm
  - Secondary + primary coating ≤ 10 mm
- Pulling tension** according to IEC 60794-1-2-E1
  - Single fibre unit 110 N
  - Cables: see table with dimensions
- Crush resistance** according to IEC 60794-1-2-E3
  - Tight buffer ≤ 4000 N/m
  - Single fibre unit ≤ 4000 N/m
  - Cable ≤ 7500 N/m
- Bending radii for fibres and tight buffers**
  - Installation/operation > 25 mm
- Bending radii cable**
  - Static according to IEC 60794-1-2-E11 – 10 x Ø
  - Dynamic according to IEC 60794-1-2-E6 – 20 x Ø
- Halogen-free** according to IEC 60754-2 (HD 602)
  - Corrosivity pH ≥ 3.5 – µS/cm ≤ 100
- Flame retardancy** according to IEC 60332-1
  -

- When laying and installing optical fibre cables [it is vitally important not to exceed the specified values](#) set for pulling tension, bending radii and temperature. The installation methods have to be in accordance with the common standards.
- If a cable needs to be fastened, constrictions must be avoided.
- To ease insertion certified lubricants (e.g. paraffin) may be used. The use of soap or similar substances as lubricants is strictly prohibited.
- Indoor optical fibre cables have been designed for use inside buildings. Consequently they are not longitudinal watertight.

- Indoor Breakout with tight buffered fibres + fibre-count x fibre-type

Standard delivery lengths: 2100 ± 100 m

# Indoor

[Back to Content](#)

## Interconnection (simplex & duplex) Cables • halogen-free, metal-free


### Application

- [Flexible terminating leads](#) such as pigtails, patchcords and test leads.
- Support all computer network applications such as [FDDI](#), [Gigabit Ethernet](#) and [ATM](#).
- Short distance applications for indoor use.

### Key features

- These cables are based on excellent strippable semi-tight buffered optical fibres.
- All dielectric (metal-free) optical fibre leads permitting direct (detensioned) termination with connectors.
- These cables are halogen-free = FRNC (Flame Retardant, Non Corrosive) and LSNH (Low Smoke, Non Halogen).
- [Predicted life time > 30 years.](#)

### Construction & dimensions

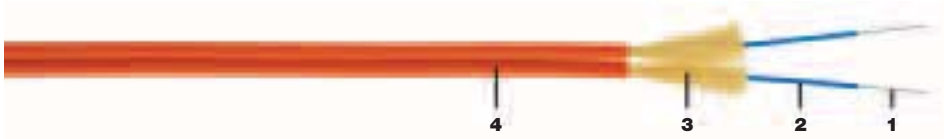

**Cable specifications** (construction in accordance with IEC 60794)

1. Primary coated optical fibres:  $\text{Ø } 250 \pm 15 \mu\text{m}$ .
2. Semi-tight buffer:  $\text{Ø } 0.9 \pm 0.1 \text{ mm}$ .  
 Colour coding of the buffered fibres with MM 62.5/125: blue  
 with MM 50/125: green  
 with SM 9/125: yellow
3. Aramid yarns as strength members.
4. [Orange](#) halogen-free (FRNC/LSNH) outer jacket. The outer jacket of the duplex version is extruded in a good splittable shape.  
 Identification: BELDEN OFC – “cable type” – I-V(ZN)H – “number x type of fibre” + date-, meter- and P/N-marking.

#### Mechanical data

No. of fibres	1	2
Type	Simplex	Duplex Fig. 8
Ø nominal (mm)	$2.8 \pm 0.2$	$(2.8 \times 5.7) \pm 0.2$
Energy of flame (kJ/m)	128	256
Weight (kg/km)	7.1	14.1

#### Options

- [Non-standard cable constructions](#), colours, details and/or additional information regarding specifications are available on request.

The right to carry out technical modifications is reserved by the manufacturer.





# Indoor

[Back to Content](#)

**Interconnection (simplex & duplex) Cables • halogen-free, metal-free**

## Optical characteristics

**Characteristics (cabled) Multi-Mode (MM) optical fibres according to IEC 60793**

Fibre-type	Size (µm)	Wavelength (nm)	Attenuation average / max. (dB/km)	Bandwidth (MHz x km)	Ethernet Performance (m)		Refractive Index
					1 GbE	10 GbE	
<b>62.5 / 125 OM1</b>	62.5 ± 2.5	850	3.0/3.2	≥ 200	275	33	1.495
<b>50 / 125 OM2</b>	50 ± 2.5	850	2.6/2.8	≥ 600	550	82	1.481
<b>50 / 125 OM2e</b>	50 ± 2.5	850	2.6/2.8	≥ 600	750	110	1.481
<b>50 / 125 OM3</b>	50 ± 2.5	850	2.6/2.8	≥ 1500	900	300	1.482
	125 ± 1	1300	0.7/0.9	≥ 600	550	n.a.	1.490
	125 ± 1	1300	0.6/0.9	≥ 1200	550	n.a.	1.476
	125 ± 1	1300	0.6/0.9	≥ 1200	2000	n.a.	1.476
	125 ± 1	1300	0.6/0.9	≥ 500	550	n.a.	1.477

Fibres with enhanced Gigabit Ethernet performance on request available.

**Characteristics (cabled) Single-Mode (SM) Matched-Cladded (MC) optical fibres according to ITU-G.652B**

Fibre-type	Size (µm)	Wavelength (nm)	Attenuation average / max. (dB/km)	Dispersion (ps/(nm x km))	PMD (ps/√km)	Refractive Index
<b>9/125 patchcord quality</b>	9.2 ± 0.4	1310	0.35/0.5	≤ 3.5		1.467
	125 ± 0.5	1550	0.21/0.3	≤ 18	≤ 0.2	1.467

A test report (attenuation) is supplied with each delivery.

## Mechanical, physical and/or environmental

- Temperature range** for lengths ≤ 100 m
  - Transport/storage -30 to +70 °C
  - Installation -5 to +50 °C
  - Operation -5 to +55 °C
- Strippability**
  - Secondary coating only ≤ 100 cm
  - Secondary + primary coating ≤ 25 mm
- Pulling tension** according to IEC 60794-1-2-E1
  - Semi-tight buffer ≤ 3 N
  - Simplex cable ≤ 200 N
  - Duplex cable ≤ 400 N
- Crush resistance** according to IEC 60794-1-2-E3
  - Semi-tight buffer ≤ 4000 N/m
  - Simplex cable ≤ 10000 N/m
  - Duplex cable ≤ 20000 N/m
- Bending radii for fibres and tight buffers**
  - Installation/operation > 25 mm
- Bending radii cable**
  - Static according to IEC 60794-1-2-E11 – 15 x Ø
  - Dynamic according to IEC 60794-1-2-E6 – 20 x Ø
- Halogen-free** according to IEC 60754-2 (HD 602)
  - Corrosivity pH ≥ 3.5 – µS/cm ≤ 100
- Flame retardancy** according to IEC 60332-1
  -

- When using Interconnection optical fibre cables [it is vitally important not to exceed the specified values](#) set for pulling tension, bending radii and temperature. The installation and termination methods have to be in accordance with the common standards.
- The primary and secondary coating are separated by means of a very thin layer of jelly. Consequently the strippability is very good. If necessary the jelly can be removed using a tissue soaked in turpentine, for example.
- Interconnection optical fibre cables have been designed for short distance applications (tens of meters) inside buildings.

- Simplex - 1 x fibre-type
- Duplex Fig. 8 - 2 x fibre-type

Standard delivery lengths: 2100 ± 100 m

# Indoor

[Back to Content](#)

## Pigtails • Dry semi-tight buffered optical fibres

### Application and key features

- Flexible terminating leads such as pigtails.
- Support all computer network applications such as [FDDI](#), [Gigabit Ethernet](#) and [ATM](#).
- Dry semi-tight buffered fibres with excellent strippability.
- Predicted life time > 30 years.

### Construction & dimensions

**Cable specifications** (construction in accordance with IEC 60794)

1. Primary coated optical fibres:  $\varnothing 250 \pm 15 \mu\text{m}$ .
2. Dry semi-tight buffer:  $\varnothing 0.9 \pm 0.1 \text{ mm}$ .

### Optical characteristics

**Characteristics (cabled) Multi-Mode (MM) optical fibres according to IEC 60793**

Fibre-type	Size ( $\mu\text{m}$ )	Wavelength (nm)	Attenuation average / max. (dB/km)	Bandwidth (MHz x km)	Ethernet Performance (m)		Refractive Index
					1 GbE	10 GbE	
<b>62.5 / 125</b>	$62.5 \pm 2.5$	850	3.0/3.2	$\geq 200$	275	33	1.495
<b>OM1</b>	$125 \pm 1$	1300	0.7/0.9	$\geq 600$	550	n.a.	1.490
<b>50 / 125</b>	$50 \pm 2.5$	850	2.6/2.8	$\geq 600$	550	82	1.481
<b>OM2</b>	$125 \pm 1$	1300	0.6/0.9	$\geq 1200$	550	n.a.	1.476
<b>50 / 125</b>	$50 \pm 2.5$	850	2.6/2.8	$\geq 600$	750	110	1.481
<b>OM2e</b>	$125 \pm 1$	1300	0.6/0.9	$\geq 1200$	2000	n.a.	1.476
<b>50 / 125</b>	$50 \pm 2.5$	850	2.6/2.8	$\geq 1500$	900	300	1.482
<b>OM3</b>	$125 \pm 1$	1300	0.6/0.9	$\geq 500$	550	n.a.	1.477

Fibres with enhanced Gigabit Ethernet performance on request available.

**Characteristics (cabled) Single-Mode (SM) Matched-Cladded (MC) optical fibres according to ITU-G.652B**

Fibre-type	Size ( $\mu\text{m}$ )	Wavelength (nm)	Attenuation average / max. (dB/km)	Dispersion (ps/(nm x km))	PMD (ps/ $\sqrt{\text{km}}$ )	Refractive Index
<b>patchcord quality</b>	$125 \pm 0.5$	1550	0.21/0.3	$\leq 18$	$\leq 0.2$	1.467

A test report (attenuation) is supplied with each delivery.

#### ■ Temperature range

Transport/storage	$-30$ to $+70 \text{ }^\circ\text{C}$
Installation	$-5$ to $+50 \text{ }^\circ\text{C}$
Operation	$-5$ to $+55 \text{ }^\circ\text{C}$

#### ■ Strippability

Secondary coating only	$\leq 100 \text{ cm}$
Secondary + primary coating	$\leq 25 \text{ mm}$

#### ■ Pulling tension

$\leq 3 \text{ N}$

#### ■ Crush resistance

according to IEC 60794-1-2-E3  
Dry semi-tight buffer  $\leq 4000 \text{ N/m}$

#### ■ Bending radii for fibres and tight buffers

Installation / operation  $> 25 \text{ mm}$

■ When using (semi-)tight buffered optical fibres [it is vitally important not to exceed the specified values](#) set for pulling tension, bending radii and temperature.

■ (Semi-)tight buffered optical fibres have been designed for [short distance \( \$\leq 10 \text{ m}\$ \) applications](#).

■ Dry semi-tight buffer + fibre-type

Standard delivery lengths:  $2100 \pm 100 \text{ m}$

The right to carry out technical modifications is reserved by the manufacturer.



# Specials

[Back to Content](#)

## Mobile cables

### Application

- These metal-free mobile cables have been designed for despooling and respooling repeatedly.

### Construction & dimensions

#### Cable specifications

1. Primary coated optical fibres:  $\varnothing 280 \pm 15 \mu\text{m}$ .
2. Tight buffered fibres:  $\varnothing 0.9 \pm 0.1 \text{ mm}$ .  
Colour coding of the buffered fibres: white – red – blue – yellow – green – violet – brown – black.
3. Swellable reinforced yarns as common strength members and for the longitudinal watertightness.
4. [Polyurethane](#) outer jacket.  
Identification: BELDEN OFC – MOBILE CABLE – “number x type of fibre” + date-, meter- and P/N-marking.

#### Mechanical Data

No. of fibres	4	6	8
$\varnothing$ nom. (mm)	5.8	6.3	7.0
Max. pulling tension (N)	800	950	1100
Energy of flame (kJ/m)	580	725	890
Weight (kg/km)	31	38	47

### Optical characteristics

#### Characteristics (cabled) Multi-Mode (MM) Graded-Index (GI) optical fibres according to IEC 60793

Fibre-type	Size ( $\mu\text{m}$ )	Wavelength (nm)	Attenuation average / max. (dB/km)	Bandwidth (MHz x km)	Ethernet Performance (m)		Refractive Index
					1 GbE	10 GbE	
<b>62.5 / 125 OM1</b>	$62.5 \pm 2.5$ $125 \pm 1$	850 1300	3.0/3.2 0.7/0.9	$\geq 200$ $\geq 600$	275 550	33 n.a.	1.495 1.490
<b>50 / 125 OM2</b>	$50 \pm 2.5$ $125 \pm 1$	850 1300	2.6/2.8 0.6/0.9	$\geq 600$ $\geq 1200$	550 550	82 n.a.	1.481 1.476
<b>50 / 125 OM2e</b>	$50 \pm 2.5$ $125 \pm 1$	850 1300	2.6/2.8 0.6/0.9	$\geq 600$ $\geq 1200$	750 2000	110 n.a.	1.481 1.476
<b>50 / 125 OM3</b>	$50 \pm 2.5$ $125 \pm 1$	850 1300	2.6/2.8 0.6/0.9	$\geq 1500$ $\geq 500$	900 550	300 n.a.	1.482 1.477

Single-Mode or Multi-Mode fibres with enhanced Gigabit Ethernet performance on request available.

A test report (attenuation) is supplied with each delivery.

- **Temperature range** according to IEC 60794-1-2-F1  
Transport/storage  $-30$  to  $+70 \text{ }^\circ\text{C}$   
Installation  $-5$  to  $+50 \text{ }^\circ\text{C}$   
Operation  $-30$  to  $+70 \text{ }^\circ\text{C}$

- **Pulling tension** according to IEC 60794-1-2-E1  
Cables: see table with dimensions

- **Bending radii for fibres and tubes**  
Installation/operation  $> 25 \text{ mm}$

- **Repeated bending** according to IEC 60794-1-2-E6  
 $> 500.000$  times

- **Strippability**  
Secondary coating only  $\leq 10 \text{ cm}$   
Secondary + primary coating  $\leq 10 \text{ mm}$

- **Watertightness** according to IEC 60794-1-2-F5

- **Flame retardancy** according to IEC 60332-2

- **Crush resistance** according to IEC 60794-1-2-E3  
Tight buffer and cable  $\leq 4000 \text{ N/m}$

- **Bending radii cable**  
Static according to IEC 60794-1-2-E11 –  $15 \times \varnothing$   
Dynamic according to IEC 60794-1-2-E6 –  $20 \times \varnothing$

- When laying and installing optical fibre cables [it is vitally important not to exceed the specified values](#) set for pulling tension, bending radii and temperature. The installation methods have to be in accordance with the common standards.

- If a cable needs to be fastened, constrictions  $\geq 0.3 \text{ mm}$  must be prevented.

- It is advisable to cap the cable-ends during storage.

- Mobile cable + N x fibre-type. Standard delivery lengths:  $2100 \pm 100 \text{ m}$

The right to carry out technical modifications is reserved by the manufacturer.



## Belden across the globe

### Europe:

#### The Netherlands

(European Headquarters)  
Belden Wire & Cable B.V.  
Edisonstraat 9  
5928 PG Venlo  
The Netherlands  
Phone: +31 77 3878555  
Fax: +31 77 3878448

E-mail:  
sales.info@belden-europe.com  
Web:  
www.belden-europe.com

#### France

Belden Electronics S.A.R.L.  
Immeuble Le César  
20, Place Louis Pradel  
69001 Lyon  
France  
Phone: +33 472 109990  
Fax: +33 478 298409

#### Hungary

Belden – Dunakabel Kft.  
Hengermalom Str. 43  
1116 Budapest  
Hungary  
Phone: +36 1206 1987  
Fax: +36 1206 1986

#### Italy

Belden International Inc.  
Via Paracelso 26  
Centro Direzionale Colleoni  
Palazzo Cassiopea Ingr. 3  
20041 Agrate Brianza (MI)  
Italy  
Phone: +39 039 6560911  
Fax: +39 039 6560929

#### Russia

Belden Office Moscow  
UL. Gubkina, 8  
117333 Moscow  
Russia  
Phone/Fax: +7 095 938 2754

#### Sweden

Belden Wire & Cable B.V.  
Stadshusplatsen 2  
14930 Nynäshamn  
Sweden  
Phone: +46 8 52010275  
Fax: +46 8 52010276

#### United Kingdom

Belden  
Delaunays Road, Blackley  
Manchester. M9 8FP  
United Kingdom  
Phone: +44 161 740 9151  
Fax: +44 161 795 8393  
E-mail: sales@belden-cd.co.uk  
Web: www.belden-cd.co.uk

### World-wide:

#### Africa/Middle East

Belden Wire & Cable  
Dubai Internet City  
Building One, Suite 216  
P.O. Box 500158  
Dubai  
United Arab Emirates  
Phone: +971 4 391 0490  
Fax: +971 4 391 8775

#### Australia

Belden Australia Pty. Ltd.  
Olympia Street  
Tottenham, Victoria 3012  
Australia  
Phone: +61 3 9224 2800  
Fax: +61 3 9314 8515

#### Canada

Belden Canada Inc.  
130 Willmott Street  
Cobourg, Ontario  
Canada K9A 4M3  
Phone: +905 372 8713  
Fax: +905 372 6291

#### Singapore

Belden International, Inc.  
101 Thompson Road, #07-02  
United Square  
Singapore 307591  
Phone: +01165 251 8211  
Fax: +01165 251 5010

#### United States

Belden Wire & Cable Co.  
P.O. Box 1980  
Richmond, IN 47375  
United States  
Phone: +1 765 983 5200  
Fax: +1 765 983 5294

All sales of Belden products are subject to Belden's terms and conditions of sale. All printing errors are subject to correction. Technical specifications are subject to change without notice. The author reserves the right not to be responsible for the topicality, correctness, completeness or quality of the information provided. Liability claims regarding damage caused by the use of any information provided, including any kind of information which is incomplete or incorrect, will therefore be rejected.