

- Для общих случаев применения
- Возможны очень малые радиусы изгиба

Технические характеристики

Среда	Сжатый воздух, вода
Макс. рабочее давление при 20°C (МПа)	1.0
Разрушающее давление	См. характеристики разрушающего давления
Диапазон рабочих температур (°C) *	-20 ~ +60 (Вода: +5 ~ +40)
Материал	Нейлон 12

* при низких температурах применяйте сухой воздух

Варианты исполнения

Тип	Типоразмер						
	TISA01□	TS0425□	TS0604□	TS0806□	TS1075□	TS1209□	TS1612□
Наружный ∅ трубки (мм)	3.18	4	6	8	10	12	16
Внутренний ∅ трубки (мм)	2.18	2.5	4	6	7.5	9	12
Мин. радиус изгиба* (мм)	12	12	15	23	27	31	60
Черный (B)	●	■	■	■	■	■	■
Белый (W)	●	■	■	■	■	■	■
Красный (R)		●	●	●	●	●	
Голубой (BU)		●	●	●	●	●	
Желтый (Y)		●	●	●	●	●	
Зеленый (G)		●	●	●	●	●	

* для 20°C, наружный диаметр трубки изменяется макс. на 10%


● в рулонах по 20 м

■ в рулонах по 20 и по 100 м



Компания SMC сохраняет за собой право на внесение технических и размерных изменений


Номер для заказа

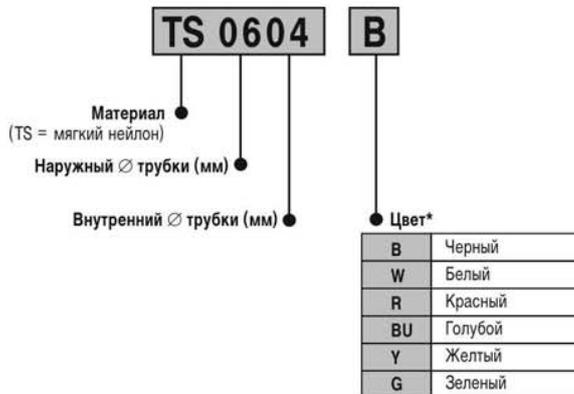

* См. таблицу

Характеристики

Разрушающее давление

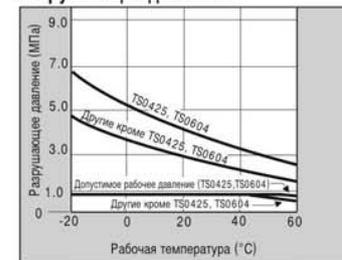

Нейлоновые трубки

T, TIA

3.18~16

- Для общих случаев применения
- 6 различных цветов трубок позволяют упростить монтаж сложных пневматических схем

Технические характеристики

Среда	Сжатый воздух, вода
Макс. рабочее давление при 20°C (МПа)	1.5
Разрушающее давление	См. характеристики разрушающего давления
Диапазон рабочих температур (°C) *	-20 ~ +60 (Вода: +5 ~ +40)
Материал	Нейлон 12

* при низких температурах применяйте сухой воздух



Варианты исполнения


Тип	Типоразмер								
	TIA01□	T0425□	T0403□	T0604□	T0645□	T0806□	T1075□	T1209□	T1613□
Наружный трубки, (мм)	3.18	4	4	6	6	8	10	12	16
Внутренний трубки (мм)	2.18	2.5	3	4	4.5	6	7.5	9	13
Мин. радиус изгиба* (мм)	5	13	25	24	36	48	60	75	100
Черный (B)	●	◐	●	◐	◐	◐	◐	◐	◐
Белый (W)	●	◐	●	◐	●	◐	●	◐	◐
Красный (R)		●		●		●	●	●	
Голубой (BU)		●		●		●	●	●	
Желтый (Y)		●		●		●	●	●	
Зеленый (G)		●		●		●	●	●	

* для 20°C, наружный диаметр трубки изменяется макс. на 10%

● в рулонах по 20 м

◐ в рулонах по 20 и по 100 м


Номер для заказа

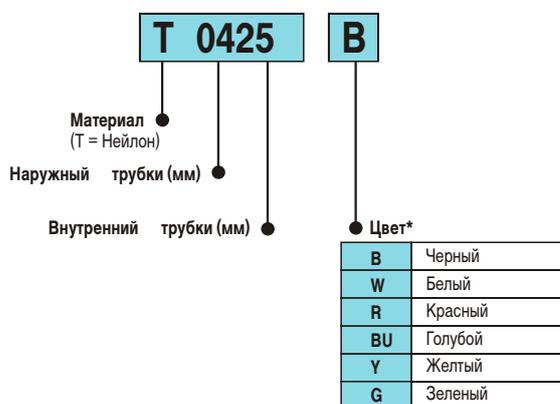

* См. таблицу

Характеристики

Разрушающее давление

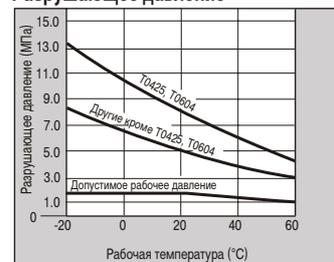

- Для общих случаев применения
- Возможны очень малые радиусы изгиба
- 7 различных цветов

Технические характеристики

Среда	Сжатый воздух, вода
Макс. рабочее давление при 20°C (МПа)	0.8
Разрушающее давление	См. характеристики разрушающего давления
Диапазон рабочих температур (°C) *	-20 ~ +60 (Вода: +5 ~ +40)
Материал	Полиуретан

* при низких температурах применяйте сухой воздух



Варианты исполнения


Тип	Типоразмер					
	TIUB01□	TU0425□	TU0604□	TU0805□	TU1065□	TU1208□
Наружный трубки (мм)	3.18	4	6	8	10	12
Внутренний трубки (мм)	2	2.5	4	5	6.5	8
Мин. радиус изгиба* (мм)	10	10	15	20	27	35
Черный (B)	●	●	●	●	●	●
Белый (W)		●	●	●	●	●
Красный (R)		●	●	●	●	●
Голубой (BU)	●	●	●	●	●	●
Желтый (Y)		●	●	●	●	●
Зеленый (G)		●	●	●	●	●
Прозрачный (C)		●	●	●	●	●

* для 20°C, наружный диаметр трубки изменяется макс. на 10%

● в рулонах по 20 м

● в рулонах по 20 и по 100 м


Номер для заказа

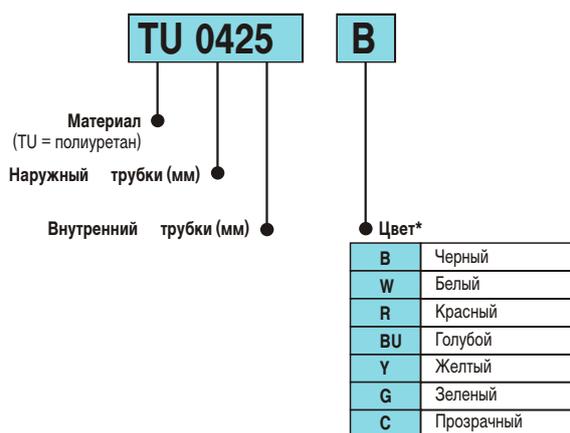

* См. таблицу

Характеристики

Разрушающее давление

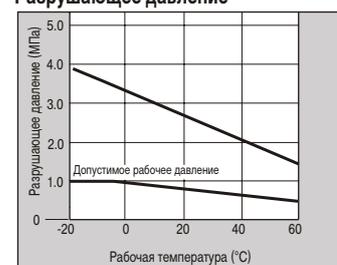

Полиуретановые витые трубки

TCU

3.18~16

- Гибкость обеспечивает компактный монтаж
- Возможно использование многоканальных трубок


Технические характеристики

Номер для заказа	TCU 0425B-1	TCU 0425B-2	TCU 0425B-3	TCU 0604B-1	TCU 0604B-2	TCU 0604B-3	TCU 0805B-1
Количество трубок	1	2	3	1	2	3	1
Наружный трубки (мм)	4			6			8
Внутренний трубки (мм)	2.5			4			5
Длина витой части (мм) L	210	280	265	325		305	330
витой части (мм) D	18	28		24	37		31
Число витков	52	35	22	54	27	17	41
Макс. рабочая длина (м)	1.5		1	2	1.5	1	2
Среда	Сжатый воздух						
Макс. рабочее давление (МПа)	0.8 при 20°C						
Разрушающее давление	См. характеристики разрушающего давления						
Диапазон рабочих температур (°C)	-20 ~ +60						
Материал	Полиуретан						
Цвет*	Черный						

*Другие цвета и длины по заказу



Размеры

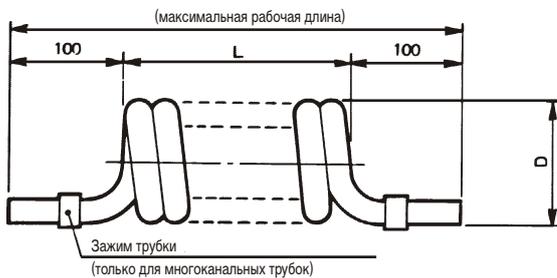

Характеристики

Разрушающее давление



Высокая химическая стойкость
Температура до 260°C




Технические характеристики

Модель	TL0403	TL0604	TL0806	TL1008	TL1210	TL1916	TIL01	TIL05	TIL07	TIL11	TIL13	TIL19	TIL25
Макс. рабочее давление* при 20°C (МПа)	1.0			0.9	0.7	0.6	1.0						
Давление разрыва при 20°C (МПа)	4.9	6.9	4.7	3.6	2.9	2.6	6.4	6.7	7.9	6.7	4.6	2.8	2.0
Мин. радиус изгиба (мм)**	20		40	65	110	160	12	20		30	60	160	290
Макс. рабочая температура (°C)	260°(постоянная)												
Материал	PFA-тефлон												


* Максимальное рабочее давление указано при 20°C. Для других температур максимальное давление рассчитывается с помощью поправочного коэффициента. Причиной разрыва трубки может оказаться резкий подъем температуры газа при адиабатическом сжатии. При температурах, отличных от 20°C, рабочее давление не должно превышать величину, рассчитанную следующим образом:
(максимальное рабочее давление) = ¼х(поправочный коэффициент)х(давление разрыва при 20°C)

** Минимальный радиус изгиба измеряется с помощью метода, представленного на рисунке.

Согните трубку в форме U при температуре 20°C. Затем, зафиксировав одну стенку, постепенно приближайте к ней вторую. В положении, когда трубка перегнется или распрямится, измерьте расстояние 2R.



Зависимость давления разрыва от температуры

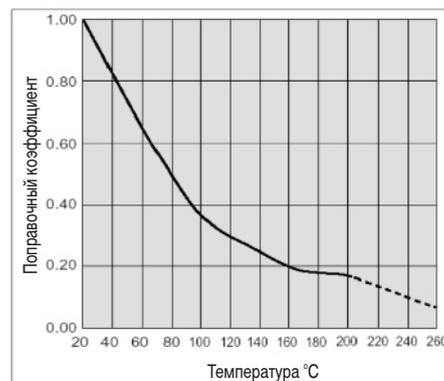

Метрические размеры

TL 0604	20
● Модель трубки	● Длина в рулоне
	10 10 м
	20 20 м

Дюймовые размеры

TIL 05	33
● Модель трубки	● Длина в рулоне
	16 16 м
	33 33 м

* См. Таблицу размеров

Размеры

		Метрические размеры (серия TL)				Дюймовые размеры (серия TIL)								
		TL0403	TL0604	TL0806	TL1008	TL1210	TL1916	TIL01	TIL05	TIL07	TIL11	TIL13	TIL19	TIL25
Наружный и внутренний диаметры (мм)		4x3	6x4	8x6	10x8	12x10	19x16	3.18x 2.18	4.75x 3.15	6.35x 3.95	9.53x 6.33	12.7x 9.50	19.05x 15.85	25.4x 22.2
Наружный диаметр (мм)	Станд. размер	4	6	8	10	12	19	3.18	4.75	6.35	9.53	12.7	19.05	25.4
	Допуск	±0.1				+0.2 -0.1		±0.1				+0.2 -0.1		
Толщина (мм)	Станд. размер	0.5	1				1.5		0.5	0.8	1.2	1.6		
	Допуск	±0.05	±0.1				±0.15		±0.05	±0.08	±0.12	±0.15		
Цвет		Прозрачный (цвет материала)												


**Полиуретановые
многоканальные трубки
TFU**

 (рулон 20 м,
сдвоенные трубки)

Модель	Наружн. Ø	Внутр. Ø
TFU0425B-2	4	2.5
TFU0604B-2	6	4
TFU0805B-2	8	5

**Полиуретановые витые трубки
TCU**


Модель	Наружн. Ø	Внутр. Ø	Кол-во трубок
TCU0425-B-1	4	2.5	1
TCU0604-B-1	6	4	1
TCU0805-B-1	8	5	1
TCU0425-B-2	4	2.5	2
TCU0604-B-2	6	4	2
TCU0425-B-3	4	2.5	3

**Держатель для трубок
TM**


Модель	Наружн. Ø	Мак. кол-во трубок в держателе
TM-04	4	12
TM-06	6	12
TM-08	8	8
TM-10	10	6
TM-12	12	6

**Резак
TK1/2/3**


Модель	Макс. Ø трубки
TK1	13
TK2	18
TK3	12

**Инструмент
для монтажа/демонтажа
трубок
TG-1**


Модель	Ø трубки
TG-1	Ø4, Ø6

Стойка для трубок
Серия TB-2

Ø трубки: 4-16 мм





Нейлоновые трубки



Нейлоновые трубки
Серия T

T 0425 B - 100

Типоразмер Ø	Типоразмер	
	наружн	внутрн
0425	4	2.5
0604	6	4
0806	8	6
1075	10	7.5
1209	12	9
1613	16	13

Рулон	
20	20м
100	100м

Цвет*

B	черный
W	белый
HU	синий

* прочие цвета по запросу

Огнеупорные нейлоновые трубки. Серия TRS
(стандарт V-O UL-94)

TRS 0603 B - 20

Типоразмер Ø	Типоразмер	
	наружн	внутрн
0603	6	3
0805	8	5
1065	10	6.5
1208	12	8



Рулон	
20	20м
100	100м

Цвет*

B	черный
----------	--------

* прочие цвета по запросу

Двухслойные огнеупорные трубки

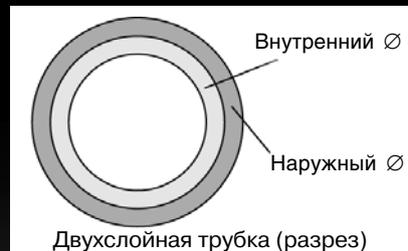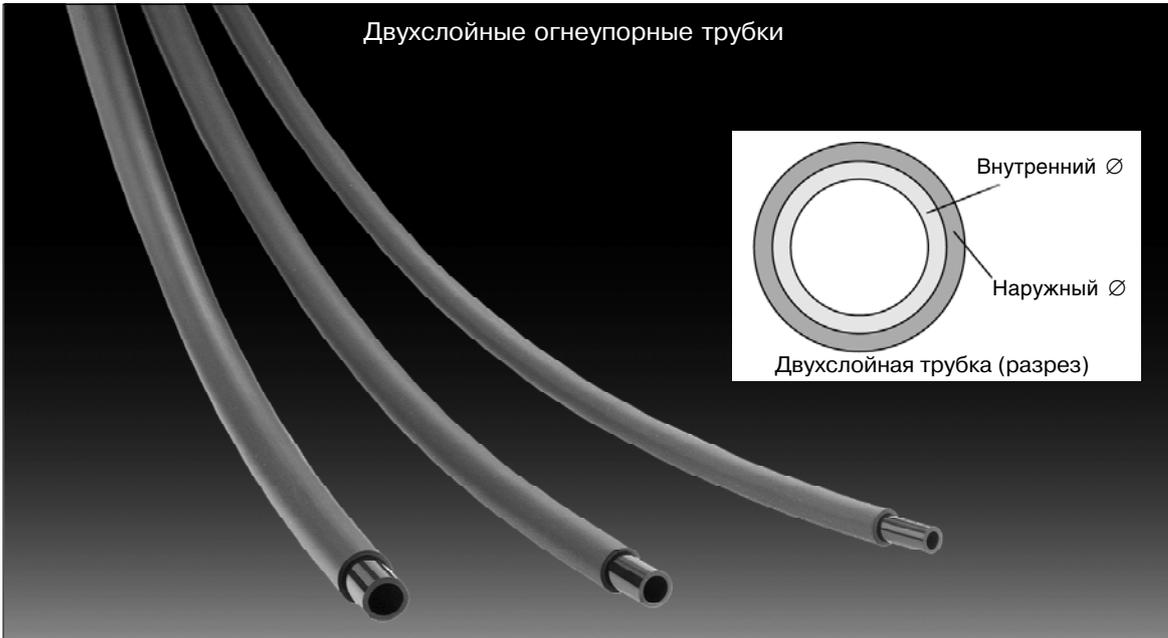


Двухслойные огнеупорные трубки
Серия TRBU

TRBU1065 B - 100

Типоразмер	Цвет*	Рулон	
		20	20м
B	черный	100	100м
W	белый		
R	красный		
HU	синий		
Y	желтый		
G	зеленый		

FEP Tubing (Fluoropolymer)

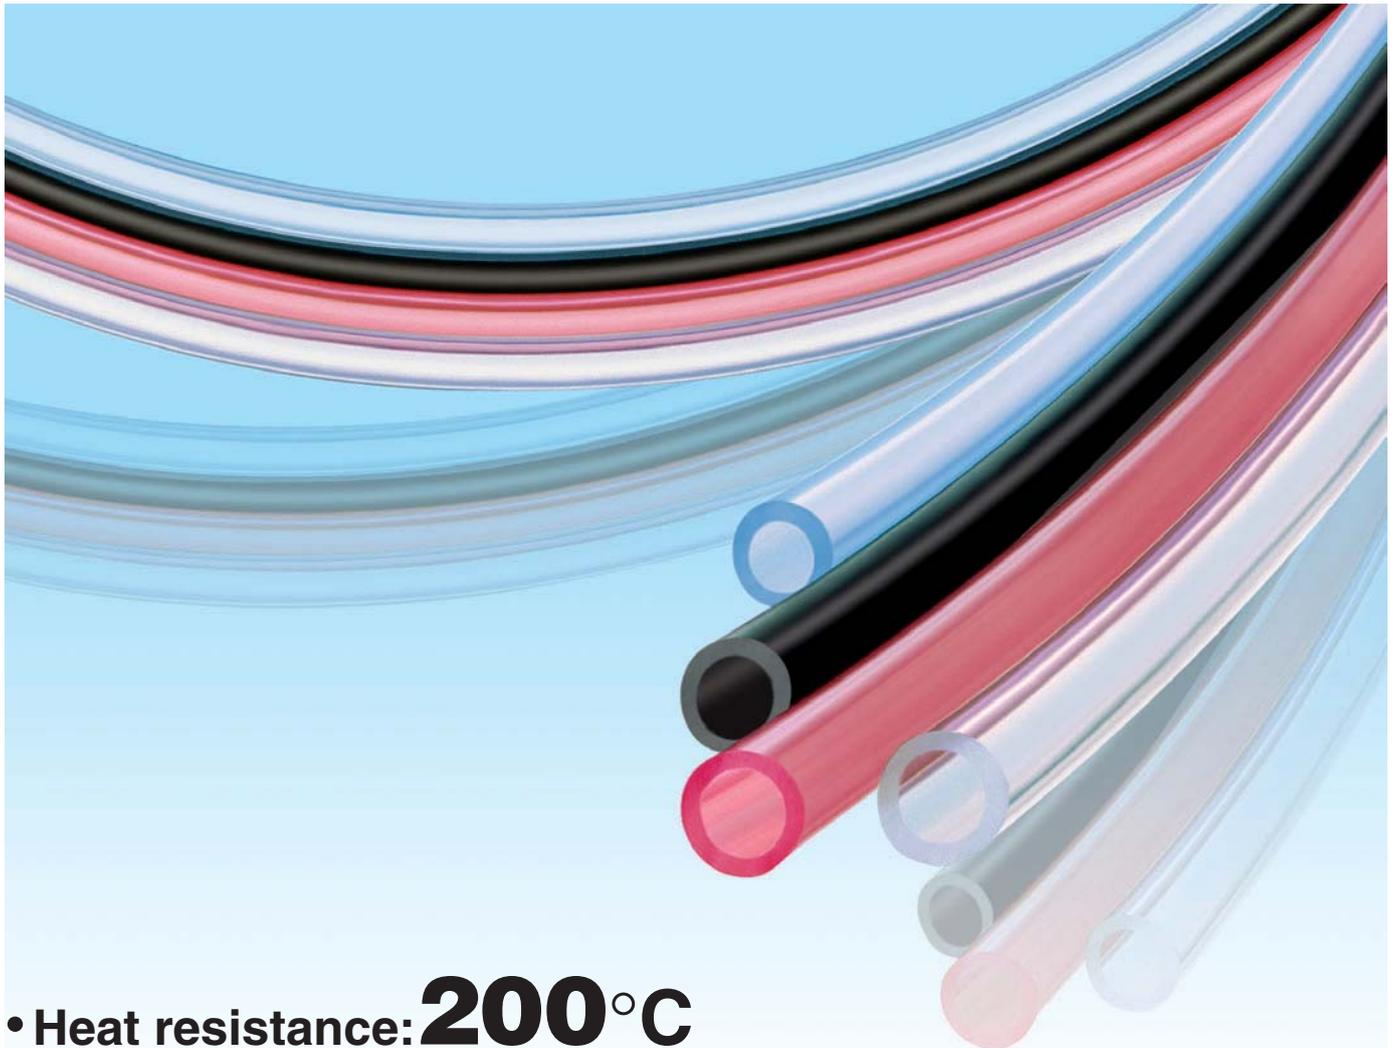

- **Heat resistance: 200°C**
It changes according to the operating pressure.
Refer to the graph of the max. operating pressures on page 1.

- **4 Color variations**



- **8 Size variations**

Metric size: $\varnothing 4$ to $\varnothing 12$

- **Applicable fittings**
One-touch fittings (Series KQ2,KJ)
Miniature fittings (Series M,MS) (Hose nipple type)
Insert fittings (Series KF)
High Purity Fluoropolymer fittings (Series LQ)

Series TH

- **Applications**

General pneumatic piping

(Food
Semiconductor
Medical care
Automobile)

- **Certified to current Food Sanitation Legislation**


(Ministry of Japanese Health and
Safety, directive #370,1959)

FEP Tubing (Fluoropolymer)

Series TH




How to measure the minimum bending radius.



At a temperature of 20°C, bend the tubing into a U shape. Fix one end and gradually move the other end closer. Measure 2R at the point where the outside diameter's rate of change is 5%.

Max. Operating Pressure

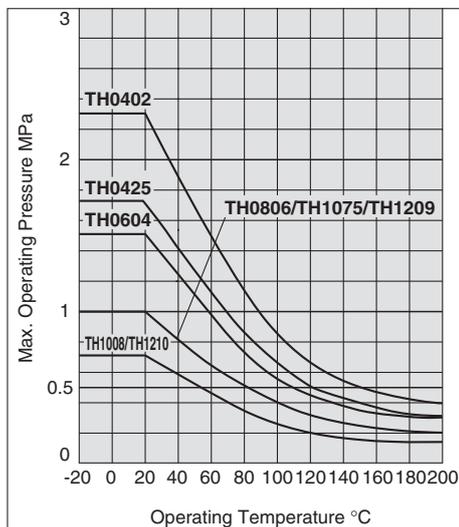

Note) The maximum operating pressure varies dependant on the I.D. bore size even if the O.D. is the same.

Series

●-20m roll □-100m roll

Model	Metric size							
	TH0402	TH0425	TH0604	TH0806	TH1075	TH1008	TH1209	TH1210
Tubing O.D. (mm)	4	4	6	8	10	10	12	12
Tubing I.D. (mm)	2	2.5	4	6	7.5	8	9	10

Color	Symbol	TH0402	TH0425	TH0604	TH0806	TH1075	TH1008	TH1209	TH1210
Translucent	N	●	●	●	●	●	●	●	●
Red (Translucent)	R	●	●	●	●	●	●	●	●
Blue (Translucent)	BU	●	●	●	●	●	●	●	●
Black (Opaque)	B	●	●	●	●	●	●	●	●

Inch nominal size
5/32"
Inch nominal size
5/16"

Specifications

Fluid	Note 4)	Air, Water Note 1), Inert gas							
Applicable fittings	Note 2)	One-touch fittings: Series KQ, KJ Insert fittings: Series KF Fluoropolymer fittings: Series LQ Miniature fittings: Series M, MS (Hose nipple type)							
Max. operating pressure		Refer to below "Max. Operating Pressure."							
Min. bending radius (mm)	Note 3)	15	20	35	60	95	100	130	
Operating temperature	Note 4)	Air, Inert gas: -20 to 200°C Water: 0 to 100°C (No freezing)							
Material		FEP (Fluorinated Ethylene Propylene Resin)							

Note 1) When using a fluid in liquid form, the surge pressure must not exceed the maximum operating pressure. A surge pressure higher than the maximum operating pressure can cause breakage of the fittings, or rupture of the tubing. Furthermore, an abnormal temperature increase due to adiabatic compression can also result in ruptured tubing.

Note 2) Do not use in locations where the FEP tubing will move.

Be sure to operate under the maximum operating pressure conditions using the lower maximum operating specification of either the tubing or fittings.

After long term use or under high temperatures, some fittings leakage may occur due to material deterioration with age. Perform periodic inspections, and if any leakage is detected, replace with a new product immediately. (Refer to maintenance part of "Tubing Precautions 1" on the page 4.)

Refer to Best Pneumatics 4 in "Fittings and Tubing" for all other precautions.

For High Purity Fluoropolymer, refer to the precautions of CAT.ES70-17, "High Purity Fluoropolymer Fittings & Tubing."

Note 3) Minimum bending radius is measured as shown left as representative values.

Allow extra length when piping since the tubing may crush if bent more than the min. bending radius.

Note 4) Consult SMC if using any other fluids.

How to Order

Metric size

TH0604

N

20

Indication of tubing model

Color indication

Symbol	Color
N	Translucent
R	Red (Translucent)
BU	Blue (Translucent)
B	Black (Opaque)

Length per roll

Symbol	Roll size
20	20m roll
100	100m roll



Chemical Resistance of the Fluoropolymer FEP Material

Chemicals in this table are inactive against FEP material ^{Note 1)}, however physical properties may be effected by temperature or pressure change.

Please make sure that operating conditions do not cause problems since the use of FEP tubing under chemical environment is unsecured.

2-nitro-2-methyl propanol 2-nitrobutanol Pentabasic benzamide N-butylamine N-octadecanol N-butyl acetate O-cresol Di-isobutyl adipate Acetophenone Acetone Aniline Abietic acid Sulfuric chloride Isooctane Liquid ammonia Ethyl alcohol Ethyl ether Ethylene glycol Ethylenediamine Zinc chloride Aluminum chloride Ammonium chloride Calcium chloride Sulfuric chloride Iron chloride (III) Benzoyl chloride Magnesium chloride Hydrochloric acid Chlorine (absolute) Aqua regia Ozone Hydrogen peroxide Natrium peroxide Gasoline Permanganate Formic acid Xylene Chromic acid Chlorosulfonic acid Chloroform Paraffinum liquidum Allyl acetate Ethyl acetate Potassium Butyl acetate	Sodium hypochlorite Carbon tetrachloride Dioxane Cyclohexanone Cyclohexane Dimethyl ether Dimethylsulfoxide Dimethylformamide Bromine Deionized water Nitric acid Mercury Ammonium hydroxide Potassium hydroxide Sodium hydroxide Cetane Soap, detergent Dibutyl sebacate Diethyl carbonate Tetrachloroethylene Tetrahydrofuran Tetrabromoethane Triethanolamine Trichloroethylene Trichloroacetic acid Toluene Naphtha Naphthalene Naphthol Lead Carbon dioxide Nitrogen dioxide Nitrobenzene Nitromethane Perchloroethylene Perphloroxylyene Unsymmetrical dimethylhydrazine Hydrazine Pinene Piperidine Glacial acetic acid (Acetic acid) Pyridine Phenol Phthalic acid Dybutyl phthalate	Dimethyl phthalate Hydrofluoric acid Naphthalene fluoride Nitrobenzene fluoride Furan Hexachlorethane Hexane Ethyl hexanoate Phenylcarbinol Benzaldehyde Benzonitrile Borax Boric acid Formic aldehyde (Formalin) Acrylic anhydride Acetic anhydride Methacrylic acid Allyl methacrylate Vinyl methacrylate Methyl alcohol Methyl ethyl ketone Methylene chloride Sulphuric acid Phosphoric acid Iron phosphate (III) Tri-n-butyl phosphate Tricresyl phosphate
--	--	---

Note 1) "Inactive in chemistry terminology" means - not to cause any chemical reaction.

Reference cited: Teflon®, the fluoropolymer handbook, Manual for the chemical applications of Teflon®. Du Pont-Mitsui Fluorochemicals Co., Ltd.

Teflon® is a registered trademark for the fluoropolymer produced by E.I du Pont de Nemours & Company (Inc.) and Du Pont-Mitsui Fluorochemicals Co., Ltd.



Series TH Safety Instructions

These safety instructions are intended to prevent a hazardous situation and/or equipment damage. These instructions indicate the level of potential hazard by a label of "**Caution**", "**Warning**" or "**Danger**". To ensure safety, be sure to observe ISO 4414 Note 1), JIS B 8370 Note 2) and other safety practices.

 **Caution** : Operator error could result in injury or equipment damage.

 **Warning** : Operator error could result in serious injury or loss of life.

 **Danger** : In extreme conditions, there is a possible result of serious injury or loss of life.

Note 1) ISO 4414: Pneumatic fluid power – General rules relating to systems

Note 2) JIS B 8370: Pneumatic system axiom

Warning

1. The compatibility of pneumatic equipment is the responsibility of the person who designs the pneumatic system or decides its specifications.

Since the products specified here are used in various operating conditions, their compatibility with the specific pneumatic system must be based on specifications or after analysis and/or tests to meet your specific requirements. The expected performance and safety assurance will be the responsibility of the person who has determined the compatibility of the system. This person should continuously review the suitability of all items specified, referring to the latest catalog information with a view to giving due consideration to any possibility of equipment failure when configuring a system.

2. Only trained personnel should operate pneumatically operated machinery and equipment.

Compressed air can be dangerous if handled incorrectly. Assembly, handling or maintenance of pneumatic systems should be performed by trained and experienced operators.

3. Do not service machinery/equipment or attempt to remove components until safety is confirmed.

1. Inspection and maintenance of machinery/equipment should only be performed once measures to prevent falling or runaway of the driven object have been confirmed.
2. When equipment is to be removed, confirm the safety process as mentioned above. Cut the supply pressure for this equipment and exhaust all residual compressed air in the system.
3. Before machinery/equipment is restarted, take measures to prevent shooting-out of cylinder piston rod, etc.

4. Contact SMC if the product is to be used in any of the following conditions:

1. Conditions and environments beyond the given specifications, or if product is used outdoors.
2. Installation on equipment in conjunction with atomic energy, railway, air navigation, vehicles, medical equipment, food and beverages, recreation equipment, emergency stop circuits, clutch and brake circuit in press applications, or safety equipment.
3. An application which has the possibility of having negative effects on people, property, or animals, requiring special safety analysis.



Series TH Tubing Precautions

Be sure to read before handling. Refer to page 3 for Safety Instructions.

Selection

Warning

1. Confirm the specifications.

The products appearing in this catalog are designed for use only in compressed air systems (including vacuum).

Do not use outside the specified ranges of pressure, temperature, etc., as this may cause damage or malfunction. (Refer to specifications.)

SMC cannot assure the product quality when fluids other than air, water and inert gas are used.

Consult with SMC for details.

2. In case of using the product for medical care

This product is designed for use with compressed air system applications for medical care purposes. Do not use in contact with human bodily fluids, body tissues or transfer applications to a human living body.

Caution

1. Do not use in locations where the connecting threads and tubing connection will slide or rotate. The connecting threads and tubing connection will come apart under these conditions.

Use rotary type one-touch fittings (Series KS, KX) in cases where sliding or rotation will occur. Only air can be used as the operating fluid, when using rotary type one-touch fittings.

2. Use tubing at or above the minimum bending radius. Using below the minimum bending radius can cause breakage or flattening of the tubing.
3. Never use the tubing for anything flammable, explosive or toxic such as, gas, fuel gas, or cooling mediums, since the contents can penetrate outward.

Mounting

Caution

1. Before mounting confirm the model and size, etc. Also, confirm that there are no blemishes, nicks or cracks in the product.
2. When tubing is connected, consider factors such as changes in the tubing length due to pressure, and allow sufficient leeway.
3. Mount so that fittings and tubing are not subjected to twisting, pulling or moment loads. This can cause damage to fittings and flattening, bursting or disconnection of tubing, etc.
4. Mount so that tubing is not damaged due to tangling and abrasion. This can cause flattening, bursting or disconnection of tubing, etc.

Piping

Caution

1. Preparation before piping

Before piping is connected, it should be thoroughly blown out with air (flushing) or washed to remove chips, cutting oil and other debris from inside the pipe. Not allowing chips of the piping thread or the seal material to go in.

Air Supply

Warning

1. Types of fluid

This product is designed for use with compressed air. Consult SMC if a different fluid is to be used.

Consult SMC regarding products for use with general purpose fluids, to confirm which fluids can be used.

2. When there is a large amount of drainage.

Compressed air containing a large amount of drainage can cause the malfunction of pneumatic equipment. An air dryer or Drain Catch should be installed upstream from filters.

3. Drain management

If air filter drains are not flushed regularly, the drainage will flow downstream leading to the malfunction of pneumatic equipment.

In cases where the management of drain flushing will be difficult, the use of filters with automatic drains is recommended.

For details on the quality of compressed air mentioned above, refer to SMC's "Best Pneumatics" catalog vol. 4.

Operating Environment

Warning

1. Do not operate in locations in an explosive atmosphere.
2. Do not operate in locations where vibration or impact occurs.
3. In locations near heat resources, block off radiant heat.

Maintenance

Caution

1. Check for the following during regular maintenance, and replace components as necessary.
 - a) Scratches, gouges, abrasion, corrosion
 - b) Leakage
 - c) Twisting, flattening or distortion of tubing
 - d) Hardening, deterioration or softness of tubing
2. Do not repair or patch the replaced tubing or fittings for reuse.
3. When using insert or miniature fittings over a long period, some leakage may occur due to age deterioration of the materials. Perform periodic inspections, and if any leakage is detected, correct the problem by additional tightening. If tightening becomes ineffective, replace the fittings with a new product immediately.